

artCILUX

Smart furniture lighting
system service provider

Customized furniture lighting solutions
Customized furniture lighting products

Smart furniture lighting system service provider

Shenzhen Shenchuan Intelligent Co.,Ltd

ADD:1001, Block A, Xiangnian Plaza, Qiaoxiang Road, Nanshan District, Shenzhen

Tel:0755-89734323

Web:www.artcilux.com



CI Lighting
For Furniture
Artcilux Product Manual

Contents

 Intelligent control

>Wireless Control Switch- - - - - P17-22

>Wired Sensor Switch - - - - - P23-24

 Cabinet luminaire

>Recessed/Surfaced Strip Light - - - - - P25-32

>Front /Rear Shelf Light - - - - - P33-38

>Front Mirror Light - - - - - P39-42

>No-Pull Handle Light - - - - - P43-46

>Drawer Sterilization Light - - - - - P47-48

>Wardrobe Light - - - - - P49-52

>Under Cabinet Light- - - - - P53-56

>Back Plate Light - - - - - P57-58

>Skirting Light - - - - - P59-62

>Flexible Strip Light - - - - - P63-68

>Spotlight - - - - - P69-78

 Intelligent power supply

>LSD01 Series - - - - - P81

>SEA Series - - - - - P82

 Application

Light gives every piece of furniture wisdom and soul

Light up for the masterpiece

OPPEIN 欧派

OLO

金牌厨柜

ZBOM 志邦厨柜

尚品宅配

顾家家居
KUKAHOLIKE
好莱客

Quanu 全友

索菲亚[®]衣柜
定制衣柜, 就是索菲亚TOTO[®]oufeel 优菲
厨柜·衣柜定制顾问

uhome

vanke 万科

M
瑪格全屋定制

Boloni

科凡定制

诗尼曼[®]
—全屋定制—采筑
ALUPU图森
TUCSON

More...

75 +

%

Cooperation with
listed companies

21

Years


Focus on
furniture lighting

Artcilux, established in 2004, is a pioneering brand in the realm of furniture lighting, dedicated to the innovation, manufacturing, and distribution of smart lighting solutions for furniture and homes. We collaborate with a global clientele, which includes esteemed partners such as TOTO, Opie, Gold Medal, Boloni, and Vanke Real Estate.

With an impressive portfolio of over 200 lighting patents, Artcilux remains at the forefront of technological advancement. We have pioneered products like the first intelligent hanging rod storage system, the ultra-thin intelligent power supply, and the S1004 touch dimmer switch, all of which have revolutionized the industry and set new standards for innovation.

In 2024, guided by our brand philosophy, "Light of Art, Light for Love," and adhering to the design ethos of "Lighting for People, Changing for People," Artcilux introduced the groundbreaking "Wukong Intelligent Lighting System" and established the industry's first 5A lighting quality standards. By redefining the five dimensions of light, we continuously enhance the user experience with the aim of "letting the light know you better," thereby crafting exquisite home lighting environments tailored to our users' needs.

Light up for the masterpiece.

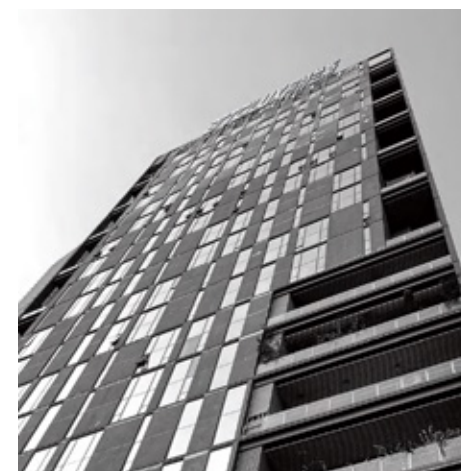

Brand Marketing Center

Shenzhen • Nanshan Owned Grade A office building



Intelligent Manufacturing Center

Dongguan JD Smart Valley Industrial Park




Power Production Center

Zhongshan • Xiaolan



Indulge in the epitome of luxury with our premium cabinets for the home. Elevate your space with custom creations, from opulent kitchens to lavish wardrobes and exquisite vanities.

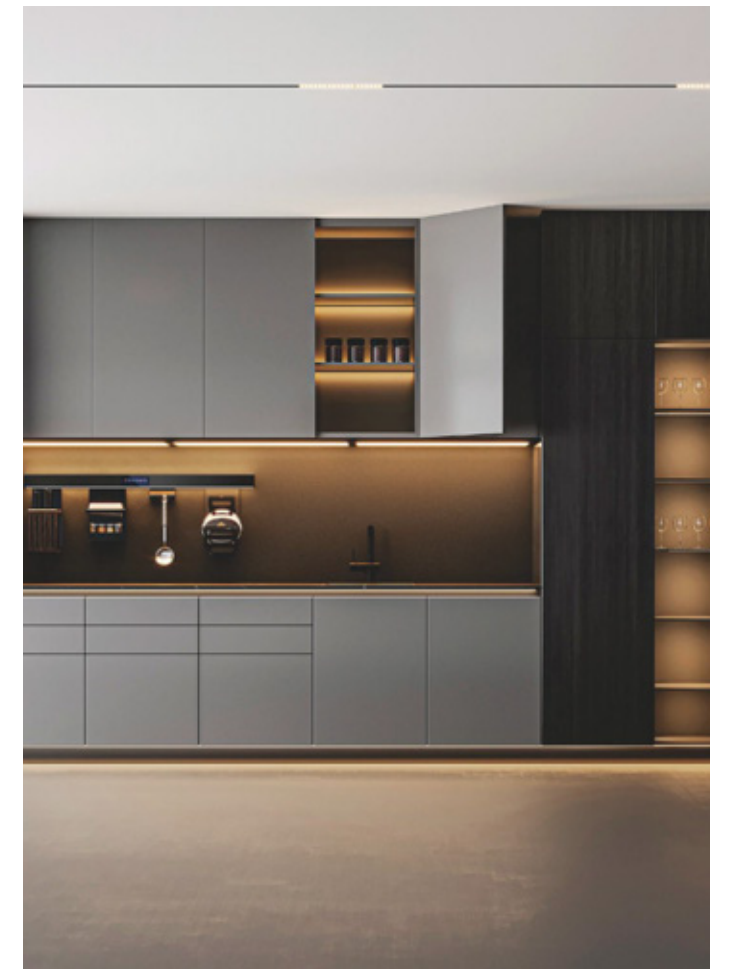

DEVELOPMENT PATH

2004

Established. dreams set sail.

2012

Cooperate with international first-line brand TOTO to stand out

2018

Won the title of "National High-tech Enterprise" The industry's first standard witness

2021

Comprehensive introduction of organizational system/financial system, professional services to reduce costs and increase efficiency

2023

Furniture cabinet lighting Initiator of double national standards

2024

Awarded Leading Brand in Furniture Lighting
Unveiled New Brand Strategy: From Furniture Lighting to Home Lighting
Launched Wukong Intelligent Control System

2025

Honored as a Renowned Brand in Shenzhen (Bay Area)
Won the German IF Design Award
The Brand Goes Global

2011

Founding of Artcilux

2016

Comprehensive cooperation with major customers
Furniture lighting industry promotes popularization

2020

Reshape the organization and systematically propose "lighting up for the masterpiece"

2022

In the year of brand growth, sales exceeded 250 million

Company Advantages

2000⁺ Patents

Adhering to independent research, development, and innovation, we have strong capabilities and have obtained hundreds of patent certifications. Our products are rapidly iterated and consistently maintain strong competitiveness.



22+

Planning automated production lines

15000m²

Private property intelligent manufacturing center

Industry leader, with obvious scale effect

Integrated research, production and sales.New Jingdong 4.0 factory·Private property rights intelligent manufacturing center 15000m²

Selected international first-line suppliers, efficient delivery capabilities and stable production capacity

800,000,000

Annual production capacity delivery standards

Annual production capacity delivery standard is 800 million yuan, leading the automation equipment industry

(Includes automated power supply production lines, Sony/Samsung placement machines, fully automatic solder paste printing machines, etc.)

33+

R&D team members

21 Years

Focus on furniture lighting R&D and manufacturing

R&D team 33+ people

20 years of focus on R&D and manufacturing of furniture lighting, strong independent innovation capabilities; hundreds of patent certificates;

Provide customers with intelligent lighting system solutions

3

Three major R&D centers

Cabinet furniture lighting, power supply , and smart home control system R&D centers (Distribution: Shenzhen/Dongguan/Zhongshan)

3-5 Years

Product warranty

Efficient delivery capability·High-quality product guarantee

Professional after-sales service and team, product warranty of 3-5 years Accurately grasp customer needs and respond quickly Complete channel policy support

PRODUCTION WORKSHOP






LIGHTING FOR FURNITURE

Intelligent Control

Quick reaction, recessed and surface-mounted.

Wired Human Body Sensing Centralized Control Switch-S1806A

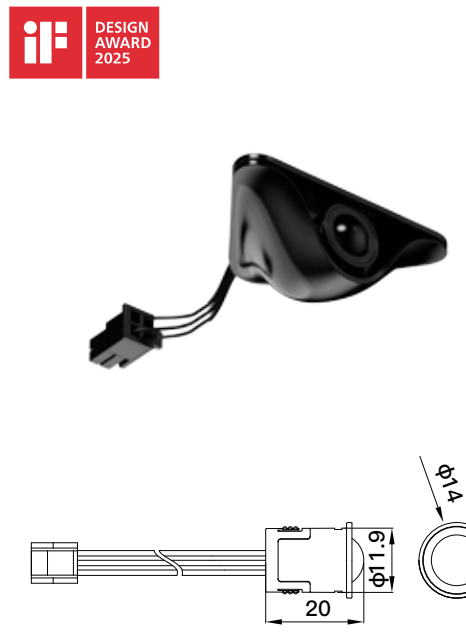


DESIGN AWARD 2025

- > Product Size: $\Phi 14 \times 19 \text{mm}$
- > Output Voltage: 5V
- > Lighting Delay: $30\text{S} \pm 5\text{S}$
- > Operating Power Consumption: $< 0.1\text{W}$
- > Input Voltage: 12/24VDC
- > Material and Color: ABS+PC black/sprayed Milky gray
- > Wire Length: 1500m
- > Sensing Distance: 0-3cm

Fast response, supports only single-door

! The sender and the receiver should not be covered by metal objects and should not be shielded by metal objects in the straight distance.

Wireless Hand-scan Sensor Remote Control Switch (Sender)-S1313SE

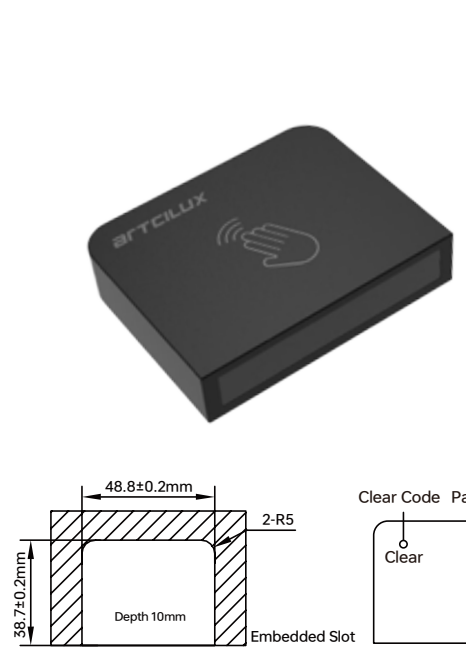

Hand icon

- > Product Size: $50 \times 40 \times 11.5 \text{mm}$
- > Operating Voltage: 3.0~3.3V
- > Battery Model: CR2450
- > Operating Power Consumption: $< 60\text{mW}$
- > Transmission Frequency: 2.4Ghz
- > Modulation Mode: GFSK
- > Remote Control Distance: 10m
- > Environmental Temperature: $-20^{\circ}\text{C} \sim 50^{\circ}\text{C}$


Short Press for Switch, Long Press for Brightness Adjustment

! Do not contact the sensing surface with the object to prevent the sender from being triggered and wasting power.

Intelligent Control

Quick reaction, recessed and surface-mounted.

Wireless Door Sensor Switch(Sender)-S1312SE

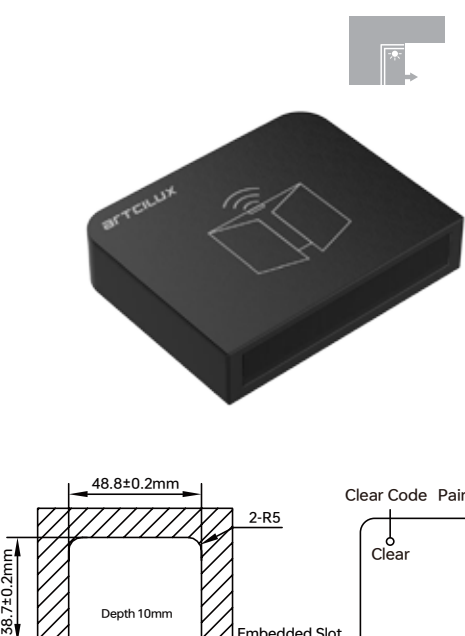


Door icon

- > Product Size: $50 \times 40 \times 11.5 \text{mm}$
- > Operating Voltage: 3.0~3.3V
- > Battery Model: CR2450
- > Operating Power Consumption: $< 60\text{mW}$
- > Transmission Frequency: 2.4Ghz
- > Environmental Temperature: $-20^{\circ}\text{C} \sim 50^{\circ}\text{C}$
- > Remote Control Distance: 10m
- > Sensing Distance: 1-3cm

Fast response, supports only single-door

! The sender and the receiver should not be covered by metal objects and should not be shielded by metal objects in the straight distance.

Wireless Single-key touch remote Control Switch (Sender)-S1314SE.DIM

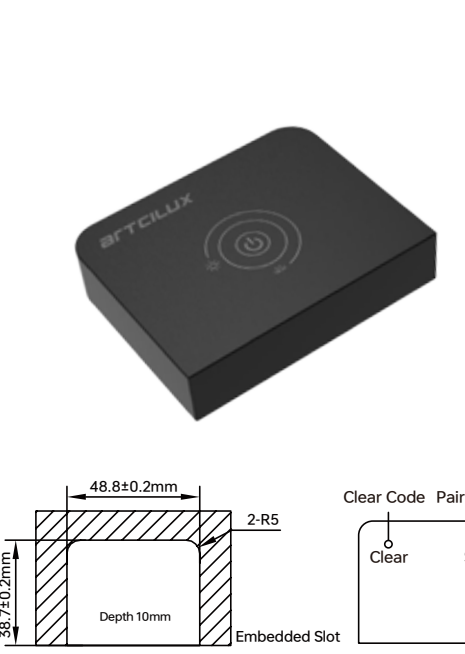

Hand icon

- > Product Size: $50 \times 40 \times 11.5 \text{mm}$
- > Operating Voltage: 3.0~3.3V
- > Battery Model: CR2450
- > Operating Power Consumption: $< 60\text{mW}$
- > Transmission Frequency: 2.4Ghz
- > Modulation Mode: GFSK
- > Remote Control Distance: 10m
- > Environmental Temperature: $-20^{\circ}\text{C} \sim 50^{\circ}\text{C}$


Short Press for Switch, Long Press for Brightness Adjustment

! Do not contact the sensing surface with the object to prevent the sender from being triggered and wasting power.

Intelligent Control

Quick reaction, recessed and surface-mounted.

Wireless Dual-key touch Remote Control Switch (Sender)-S1314SE.CCT

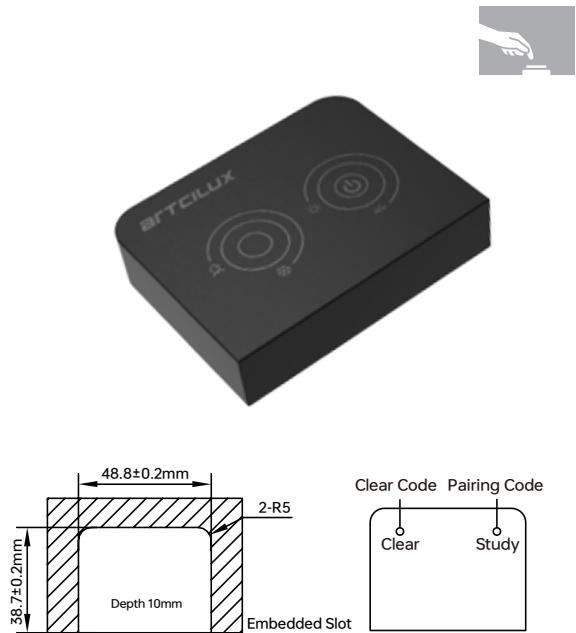


> Product Size:	50x40x11.5mm
> Operating Voltage:	3.0~3.3V
> Battery Model:	CR2450
> Operating Power Consumption:	<60mW
> Transmission Frequency:	2.4Ghz
> Remote Control Distance:	10m
> Environmental Temperature:	-20°C~50°C

Lights on when people come, lights off 30 seconds after people leave

! The sender and the receiver should not be covered by metal objects and should not be shielded by metal objects in the straight distance.

Wireless Human body Sensing Remote Control Switch(Sender)-S1316SE

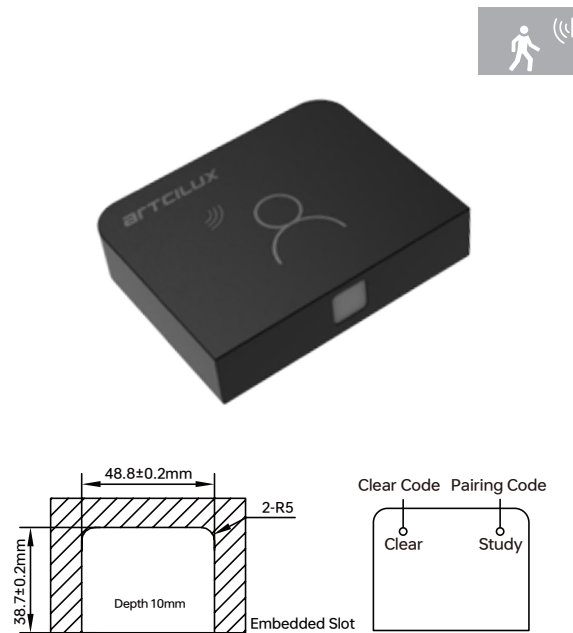

> Product Size:	50x40x11.5mm
> Operating Voltage:	3.0~3.3V
> Battery Model:	CR2450
> Operating Power Consumption:	<60mW
> Transmission Frequency:	2.4Ghz
> Environmental Temperature:	-20°C~50°C
> Remote Control Distance:	10m
> Sensing Distance:	1-3cm

Fast response, supports only single-door

! The sender and the receiver should not be covered by metal objects and should not be shielded by metal objects in the straight distance.

Wireless Touch Sensor Switch(Sender)-S1015AS




> Product Size:	φ30x16mm
> Operating Voltage:	3.0~3.3V
> Battery Model:	CR1632
> Operating Power Consumption:	<60mW
> Transmission Frequency:	2.4Ghz
> Modulation Mode:	GFSK
> Remote Control Distance:	6m
> Environmental Temperature:	-20°C~50°C

25mm Slot Size, Compact Switch

! Do not contact the sensing surface with the object to prevent the sender from always being triggered and wasting power.

86 Panel Switch (Sender)-AS3539

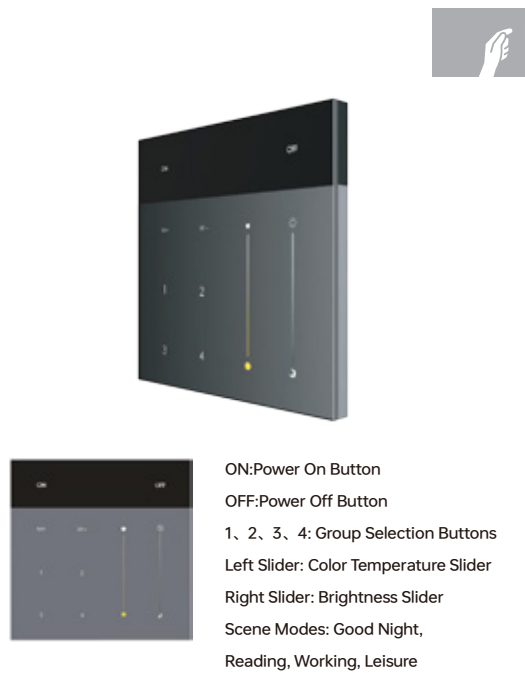


> Product Size:	86x86x12mm
> Operating Voltage:	3.0~3.3V
> Battery Model:	CR2450
> Operating Power Consumption:	<60mW
> Transmission Frequency:	2.4Ghz
> Remote Control Distance:	6M
> Modulation Mode:	GFSK
> Environmental Temperature:	-20°C~50°C

Universal for Single and Dual Color Temperature, 4 Independent Switches.

! Do not contact the sensing surface with the object to prevent the remote control from always being triggered and wasting power.

Intelligent Control

2.4G Controller (Receiver)-S1015D

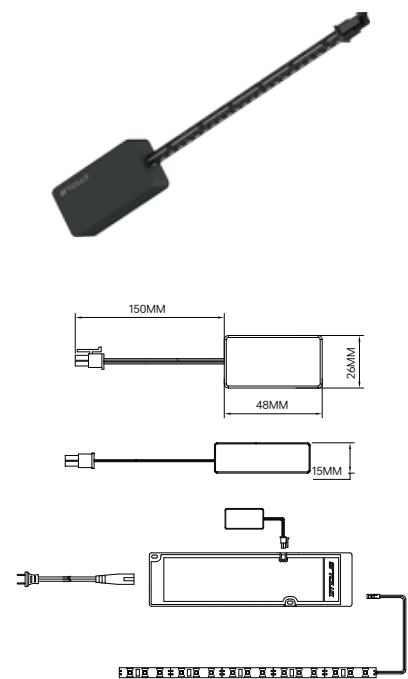


- > Product Size: 49x26x15mm
- > Operating Voltage: 12V/24V
- > Load Power: Power dependent
- > Operating Power Consumption: <1W
- > Transmission Frequency: 2.4Ghz
- > Brightness Level: Level 1000
- > Color Temperature Level: Level 1000
- > Environmental Temperature: -20°C~50°C
- > Output Signal: 1*PWM/240Hz

Single and double color temperature automatic recognition.

! The sender and the receiver should not be covered by metal objects and should not be shielded by metal objects in the straight distance.

2.4G Controller (Receiver)-S1015H

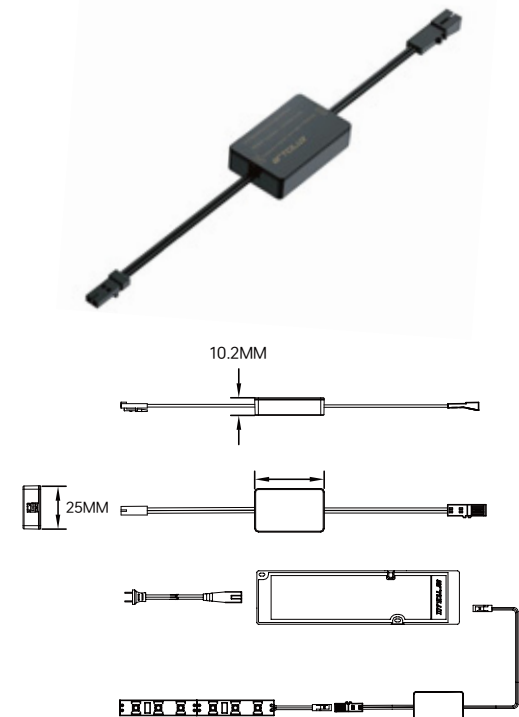


- > Product Size: 40x25x10.2mm
- > Operating Voltage: 12V/24V
- > Load Power: 60W
- > Modulation Mode: GFSK
- > Transmission Frequency: 2.4Ghz
- > Remote Control Distance: 10M
- > Control Method: Dimming/Switch

Sub-Control 2.4G Single Color Temperature Receiver.

! The sender and the receiver should not be covered by metal objects and should not be shielded by metal objects in the straight distance.

Intelligent Control

Single Group Dimming Controller(Receiver)-S1361.DIM.1H

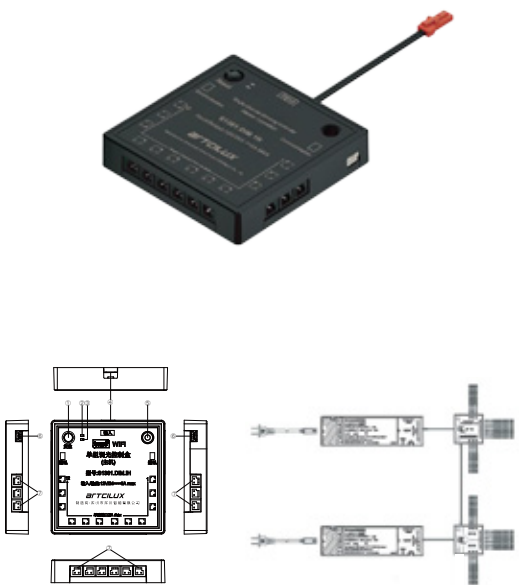


- > Product Size: 74.8x74.8x15mm
- > Operating Voltage: 12V/24V
- > Load Current: 5A Max
- > Operating Power Consumption: <1W
- > Transmission Frequency: 2.4Ghz
- > Brightness Level: Level 1000
- > Color Temperature Level: Level 1000
- > Smart Platform: TUYA
- > Single Port: 3A Max

Built-in 2.4G+ Tuya Wifi module

! The sender and the receiver should not be covered by metal objects and should not be shielded by metal objects in the straight distance.

Tuya Controller (Receiver)-S1361.CCT.1H

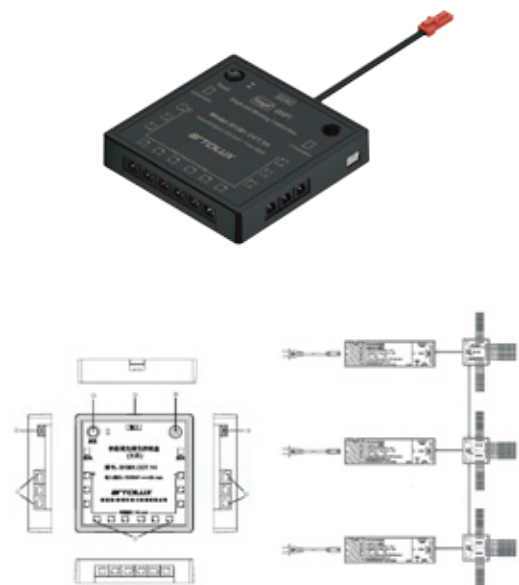


- > Product Size: 74.8x74.8x15mm
- > Operating Voltage: 12V/24V
- > Load Current: 5A Max
- > Operating Power Consumption: <1W
- > Transmission Frequency: 2.4Ghz
- > Brightness Level: Level 1000
- > Color Temperature Level: Level 1000
- > Smart Platform: TUYA
- > Single Port: 3A Max

Built-in 2.4G+ Tuya Wifi module, single and dual color temperature power supply identification, can control 3 power supplies at the same time

! The sender and the receiver should not be covered by metal objects and should not be shielded by metal objects in the straight distance.

Intelligent Control

Single/Dual Door Sensor Switch(S1602.1S/S1602.2S)

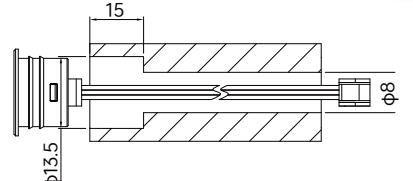

>Product Size: $\phi 16 \times 10 \text{mm}$

>Hole Size: $\phi 13.5 \times 15 \text{mm}$

>Operating Voltage: 12V/24V


>Load Power: 60W

>Sensing Distance: 3-5cm


>Installation Method: Embedded/Surface-mounted

Supports single and double head interchangeability, supports centralized control mode with adapter cables.

 The sensor head should not be covered by metal objects and should not be shielded by metal objects in the straight distance.

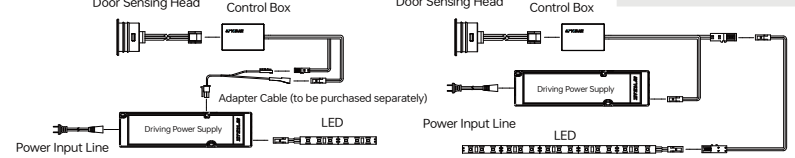

Single/Dual Hand Movement Sensor Switch(S1603.1S/S1603.2S)

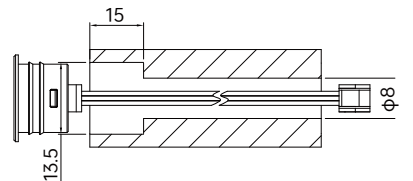

>Product Size: $\phi 16 \times 10 \text{mm}$

>Hole Size: $\phi 13.5 \times 15 \text{mm}$

>Operating Voltage: 12V/24V


>Load Power: 60W

>Sensing Distance: 1-3cm

>Installation Method: Embedded/Surface-mounted


Supports single and double head interchangeability, supports centralized control mode with adapter cables.

 The sensor head should not be covered by metal objects and should not be shielded by metal objects in the straight distance.

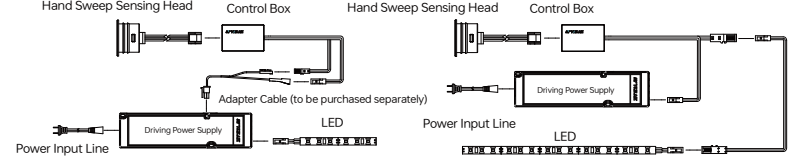

Intelligent Control

Single/Dual Touch Sensor Switch(S1604.1S/S1604.2S)

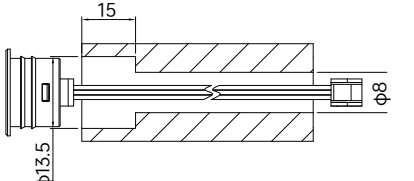

>Product Size: $\phi 16 \times 10 \text{mm}$

>Hole Size: $\phi 13.5 \times 15 \text{mm}$

>Operating Voltage: 12V/24V


>Load Power: 60W

>Sensing Distance: 0mm


>Installation Method: Embedded/Surface-mounted

Short Press for Switch, Long Press for Dimming, Modular, supports dual heads, supports centralized control mode.

 The sensor head should not be covered by metal objects and should not be shielded by metal objects in the straight distance.

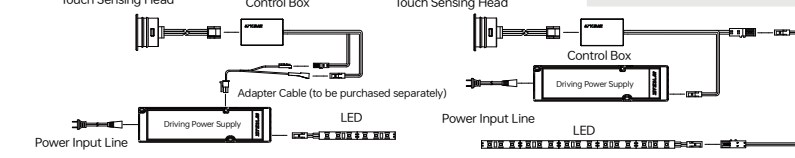

(PIR)Human Body Sensor Switch(S1606.1S/S1606.2S)

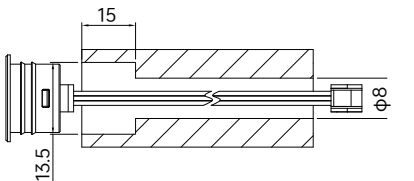

>Product Size: $\phi 16 \times 10.7 \text{mm}$

>Hole Size: $\phi 13.5 \times 15 \text{mm}$

>Operating Voltage: 12V/24V


>Load Power: 60W

>Sensing Distance: 1-3m


>Installation Method: Embedded/Surface-mounted

Supports single and double head interchangeability, supports centralized control mode with adapter cables.

 The sensor head should not be covered by metal objects and should not be shielded by metal objects in the straight distance.

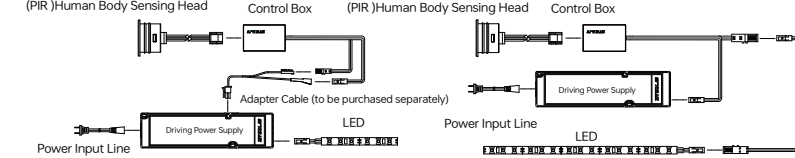

Recessed Strip Light

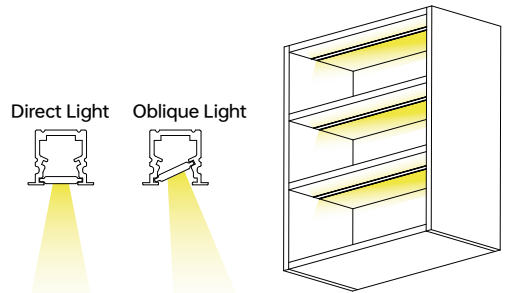


	3000 K	4000 K	6000 K
934 lx			250mm
233 lx			500mm
103 lx			750mm
58 lx			1000mm

- > Brightness Adjustment: Yes
- > Material: Aluminum + PC
- > LED Chip: SMD2219
- > Installation Method: Embedded in Hole
- > Fixture Size: 12x10 mm
- > Hole Size: 10x10 mm
- > Slot Reduction: 3 mm
- > Standard Configuration: Oblique/Direct Light Cover , Clips, End Caps, Plug-in Terminals



Direct/Oblique Light Shared Design;
Hardware Clip Installation, Eco-Friendly;
Supports Custom Cutting, Effectively Reduces SKU Accumulation;
12V Safe Low Voltage Drive, No Polarity, Plug and Play;
Quick Plug-in Terminals, Power Terminals Can Be Plugged In Either Side.

When embedded in a hole, the protection rating will drop from IP44 to IP20.

Voltage	CCT	Power	LED Chip Specification	Color Rendering Index	Product Color
V	K	W/m	SMD	R _a	
12	3000	7.5	SMD2219	>90	Galaxy Gray
	4000	7.5	SMD2219	>90	
	6000	7.5	SMD2219	>90	

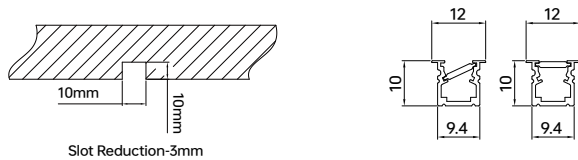

Recessed Strip Light

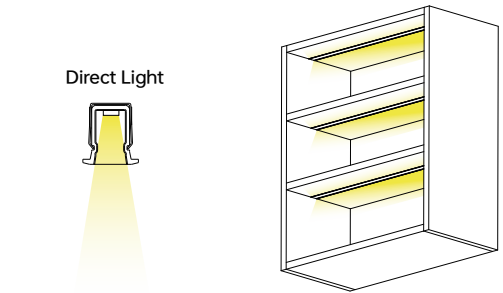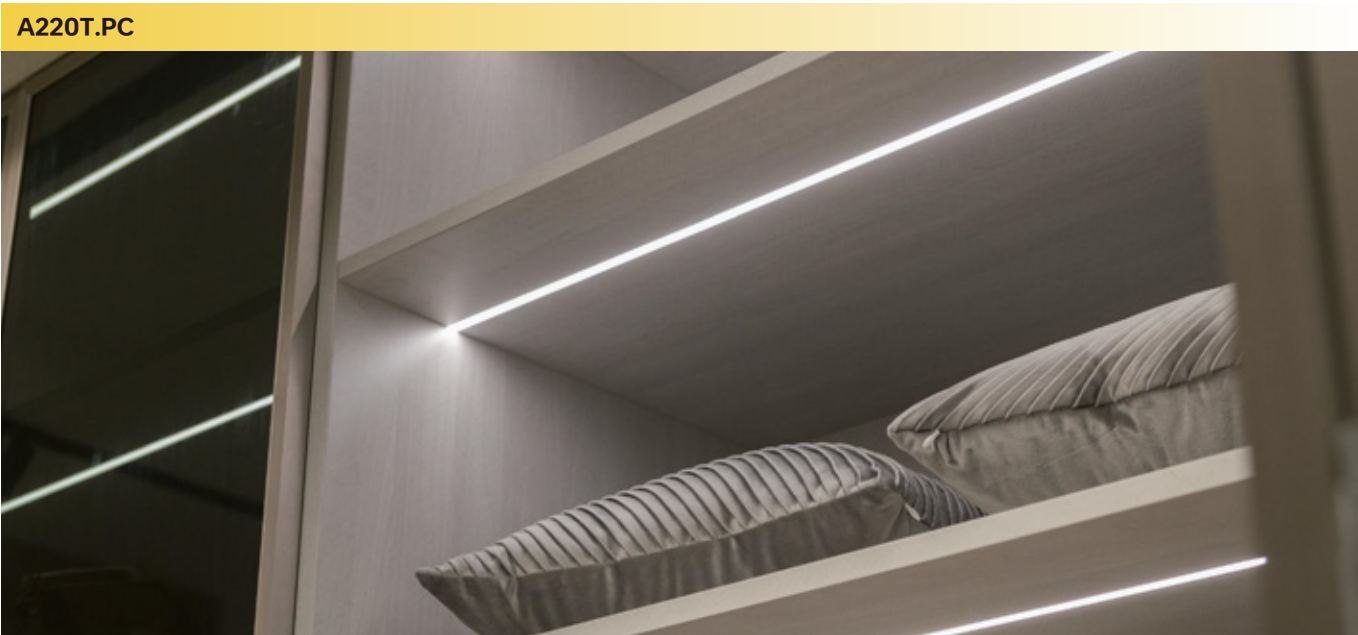


	3000 K	4000 K	6000 K
510 lx			250mm
127 lx			500mm
56 lx			750mm
31 lx			1000mm

- > Brightness Adjustment: Yes
- > Material: Aluminum + PC
- > LED Chip: SMD2216
- > Installation Method: Embedded in Hole
- > Fixture Size: 6.6x7 mm (Edge-Blocked Version)
5x7mm (Regular Version)
- > Hole Size: 5x8 mm
- > Slot Reduction: Not
- > Standard Configuration: Clips

Length can be customized according to needs;
Extremely thin and narrow design, only 5mm wide;
PC cover for light guiding, soft light without glare;
Clip installation, eco-friendly, simple and reliable;
Suitable for local and ambient lighting of cabinets, wardrobes,
display cabinets, etc.

When embedded in a hole, the protection rating will drop from IP44 to IP20.

Voltage	CCT	Power	LED Chip Specification	Color Rendering Index	Product Color
V	K	W/m	SMD	R _a	
12	3000	6	SMD2216	>90	Dark Gray Silver
	4000	6	SMD2216	>90	
	6000	6	SMD2216	>90	

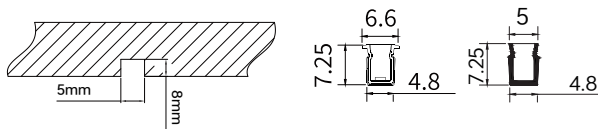

Recessed Strip Light



> Brightness Adjustment: Yes

> Material: Aluminum + PC

> LED Chip: SMD2835

> Installation Method: Embedded in Hole

> Fixture Size: 9x9 mm

> Hole Size: 7.2x9 mm

> Slot Reduction: 5 mm

> Standard Configuration: Clips

The product uses clip installation, making it easy to install and maintain; Milky White PC Cover for light guiding, soft light without glare; Embedded installation, can be flush with pre-cut slots, simple and reliable; Suitable for installation in cabinets, wall cabinets, display cabinets, etc.


When embedded in a hole, the protection rating will drop from IP44 to IP20.

Voltage	CCT	Power	LED Chip Specification	Color Rendering Index	Product Color
V	K	W/m	SMD	R _a	
12	3000	7.5	SMD2835	>90	Dark Gray Silver
	4000	7.5	SMD2835	>90	
	6000	7.5	SMD2835	>90	

3000 K 4000 K 6000 K

760 lx	860 lx	840 lx		250 mm
190 lx	215 lx	210 lx		500 mm
85 lx	95 lx	95 lx		750 mm
48 lx	50 lx	50 lx		1000 mm

Recessed Strip Light

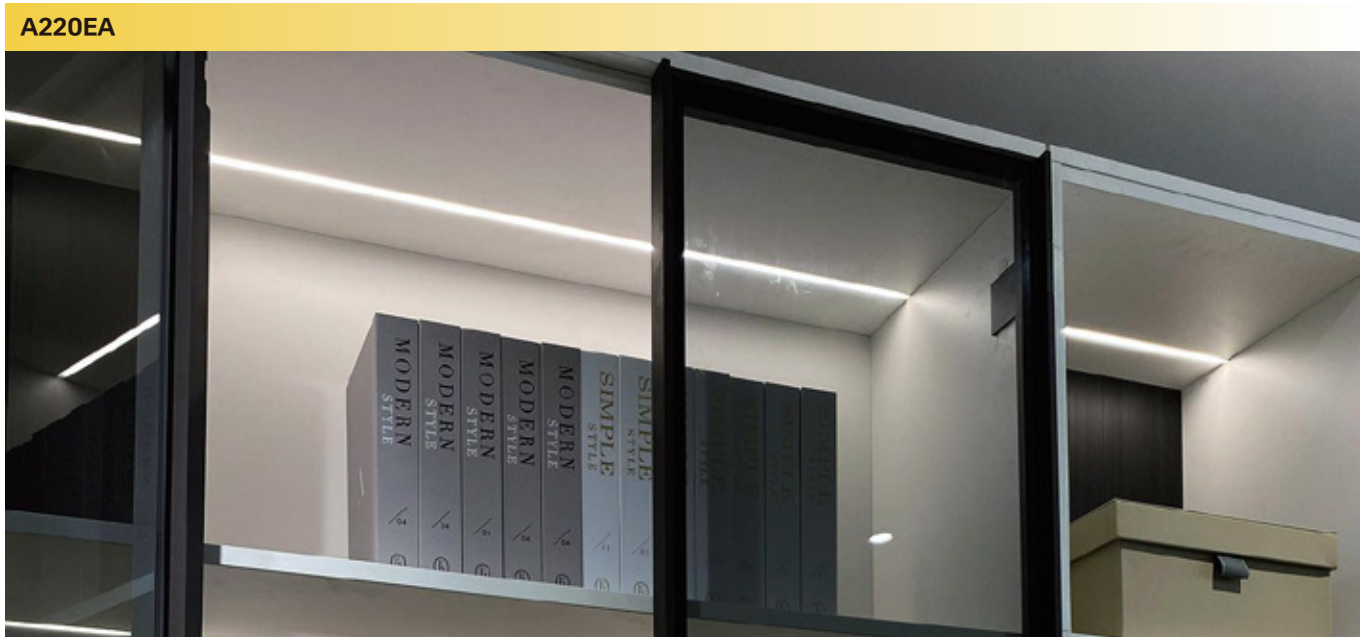

> Brightness Adjustment: Yes

> Material: Aluminum + PC

> LED Chip: SMD2835

> Installation Method: Embedded in Hole

> Fixture Size: 21x7.3 mm

> Hole Size: 20x8.5 mm

> Slot Reduction: Not

> Standard Configuration: Clips

Clip installation is eco-friendly and healthy; length can be customized according to needs; surface treated with oxidation, multiple color options available; oblique reflection light principle avoids glare; suitable for local and ambient lighting of cabinets, wine cabinets, display cabinets, etc.


When embedded in a hole, the protection rating will drop from IP44 to IP20.

Voltage	CCT	Power	LED Chip Specification	Color Rendering Index	Product Color
V	K	W/m	SMD	R _a	
12	3000	7.5	SMD2835	>90	Silver Iron Gray
	4000	7.5	SMD2835	>90	
	6000	7.5	SMD2835	>90	

3000 K 4000 K 6000 K

760 lx	860 lx	840 lx		250 mm
190 lx	215 lx	210 lx		500 mm
85 lx	95 lx	95 lx		750 mm
48 lx	50 lx	50 lx		1000 mm


Recessed Strip Light

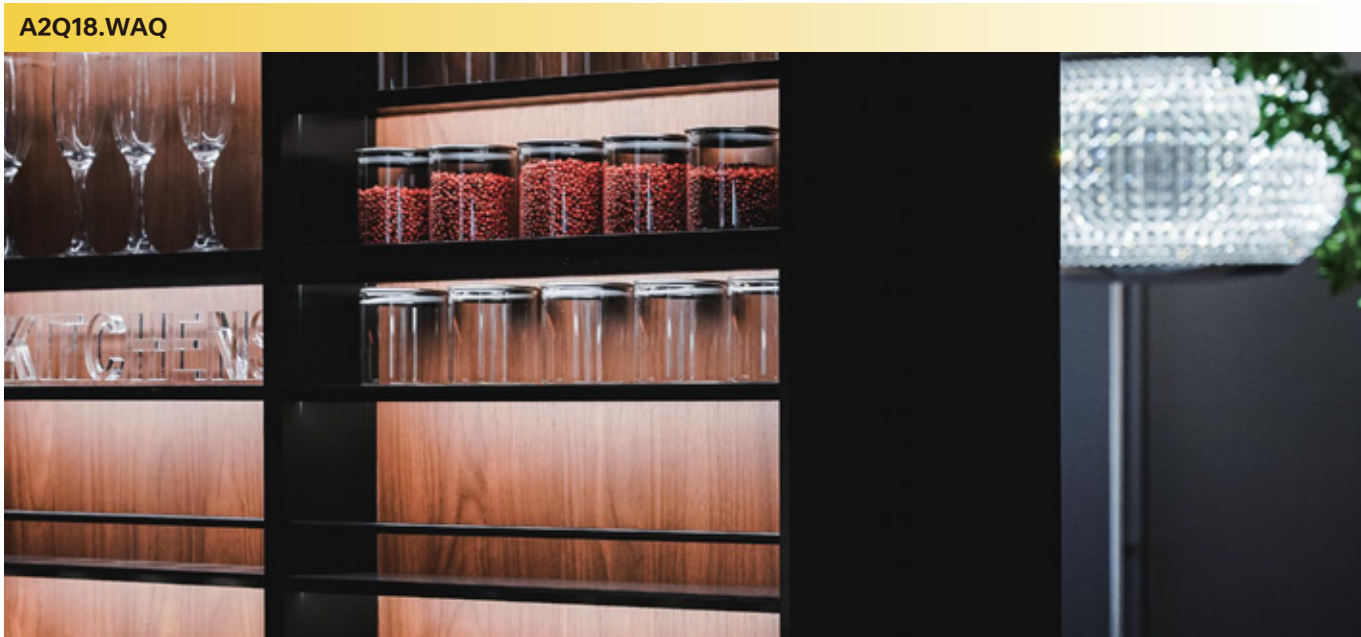






- > Brightness Adjustment: Yes
- > Material: Aluminum + PC
- > LED Chip: SMD2835
- > Installation Method: Embedded in Hole
- > Fixture Size: 13x12 mm
- > Hole Size: 10.5x12 mm
- > Slot Reduction: 17 mm
- > Standard Configuration: Clips





Direct Light



Voltage	CCT	Power	LED Chip Specification	Color Rendering Index	Product Color
V	K	W/m	SMD	R _a	
12	3000	7.5	SMD2835	>90	Silver
	4000	7.5	SMD2835	>90	
	6000	7.5	SMD2835	>90	

3000 K 4000 K 6000 K


1061 lx		250mm
265 lx		500mm
117 lx		750mm
66 lx		1000mm

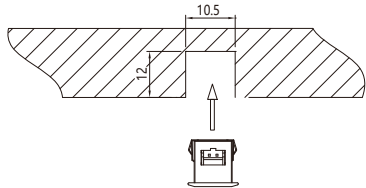

Separated power line, easier installation and maintenance;
Hand-sweep luminous surface is bright and free of dark areas;
Clip embedded installation can be flush with pre-cut slots, simple and reliable;
Suitable for installation in cabinets, wall cabinets, display cabinets, etc.

When embedded in a hole, the protection rating will drop from IP44 to IP20.


Recessed Strip Light

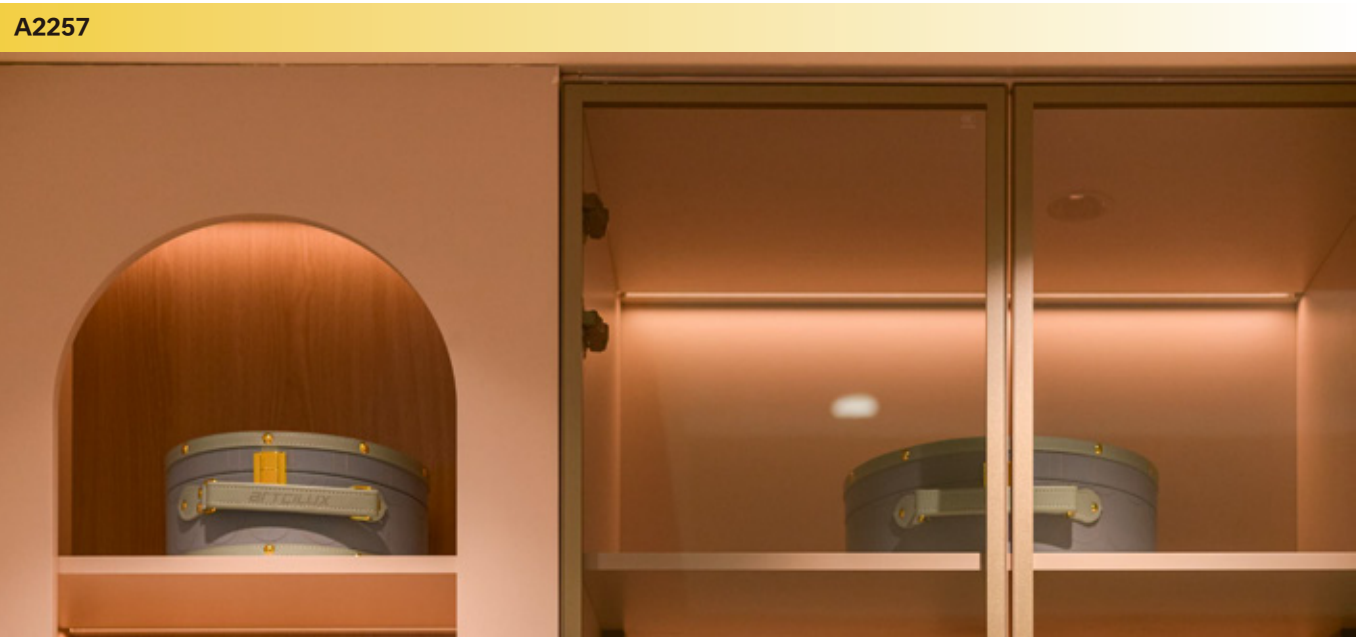






- > Brightness Adjustment: Yes
- > Material: Aluminum + PC
- > LED Chip: SMD2835
- > Installation Method: Embedded in Hole
- > Fixture Size: 22x8 mm
- > Hole Size: 17.5x6.2 mm
- > Slot Reduction: 8 mm
- > Standard Configuration: Clips





Direct Light



Voltage	CCT	Power	LED Chip Specification	Color Rendering Index	Product Color
V	K	W/m	SMD	R _a	
12	3000	7.5	SMD2835	>90	Silver
	4000	7.5	SMD2835	>90	
	6000	7.5	SMD2835	>90	

3000 K 4000 K 6000 K


760 lx	860 lx	840 lx		250 mm
190 lx	215 lx	210 lx		500 mm
85 lx	95 lx	95 lx		750 mm
48 lx	50 lx	50 lx		1000 mm



Card installation , Environmental protection and health;
Length can be customized according to requirements;
The surface is oxidized and a variety of colors are available
Angular reflection and luminescence principle, to avoid dazzling light;

When embedded in a hole, the protection rating will drop from IP44 to IP20.

Surface-Mounted Triangle Light

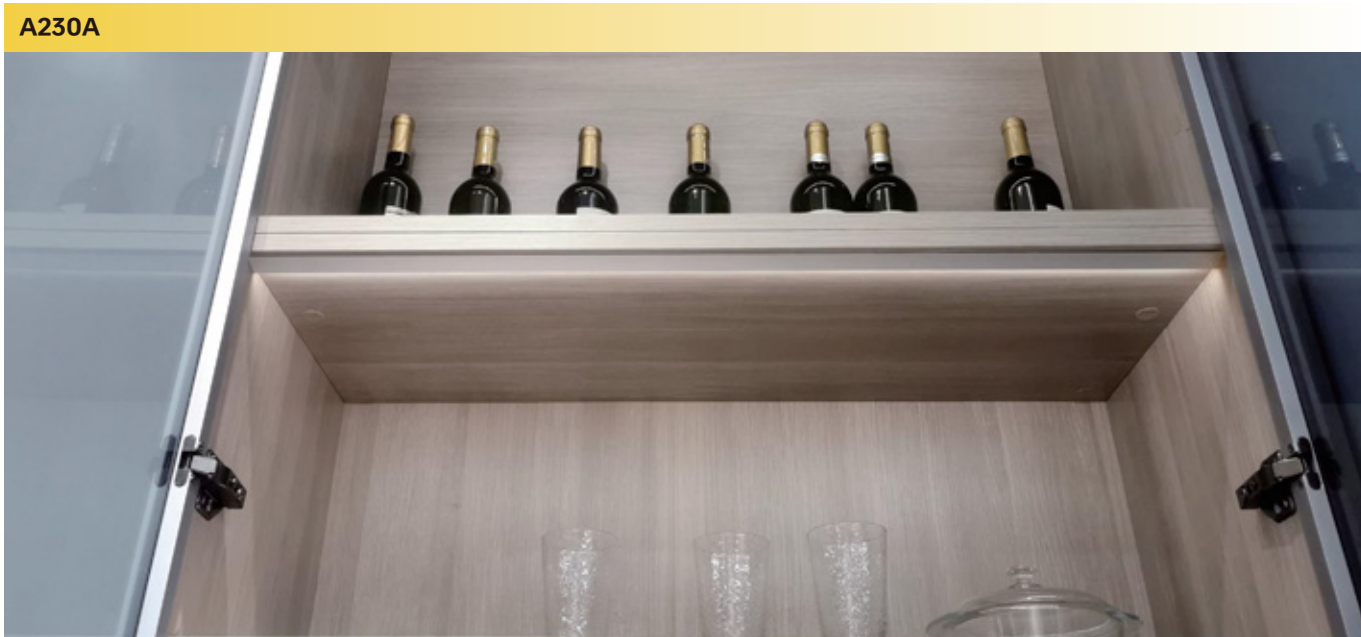


- > Brightness Adjustment: Yes
- > Material: Aluminum + PC
- > LED Chip: SMD2216
- > Installation Method: Surface-mounted
- > Fixture Size: 23x6.4 mm
- > Standard Accessories: 3M adhesive/screws

The lamp body is made of high-quality aluminum with a high hardness anodized surface treatment; the cover has good light transmission performance, providing soft and comfortable light; compact structure for easy installation, achieving local lighting inside cabinets.

Please regularly wipe with a dry soft cloth to maintain the original surface treatment effect; strong cleaning agents are prohibited.

Voltage	CCT	Power	LED Chip Specification	Color Rendering Index	Product Color
V	K	W/m	SMD	R _a	
12	3000	6	SMD2216	>90	Dark Gray Silver
	4000	6	SMD2216	>90	
	6000	6	SMD2216	>90	


Inward-lighting

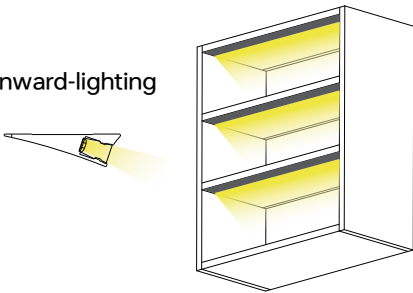

3000 K	4000 K	6000 K		
760 lx	860 lx	840 lx	☀	250 mm
190 lx	215 lx	210 lx	☀	500 mm
85 lx	95 lx	95 lx	☀	750 mm
48 lx	50 lx	50 lx	☀	1000 mm



Front Shelf Light

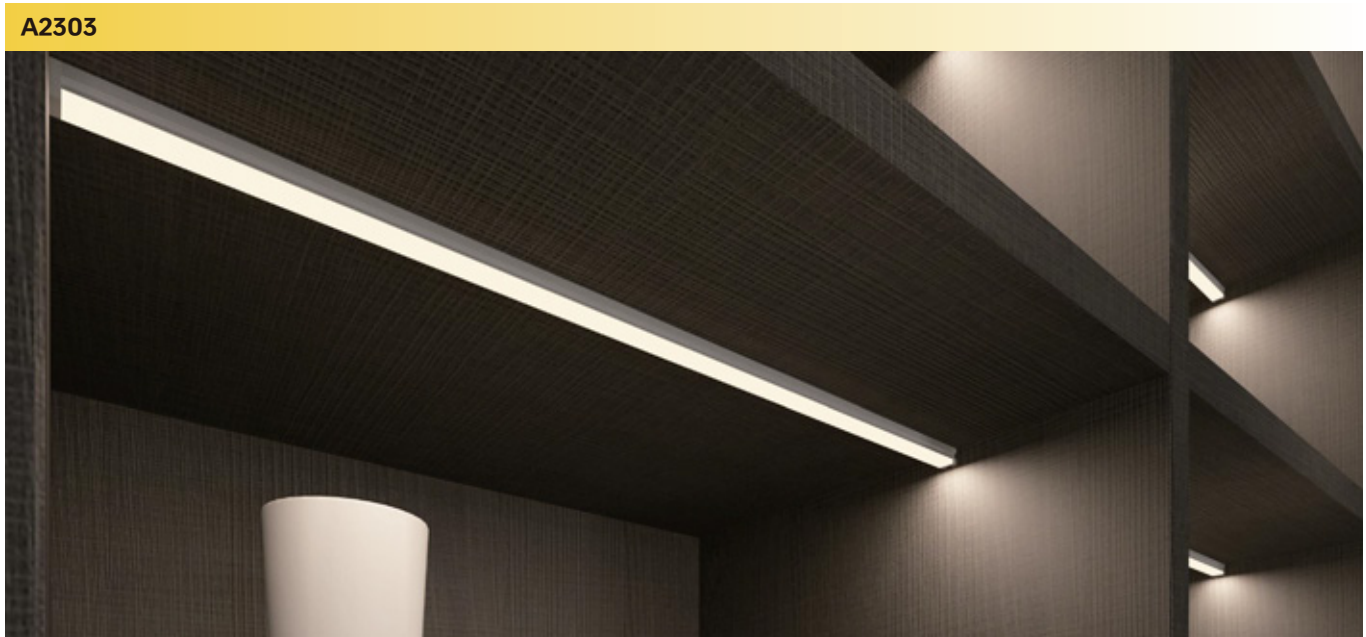


- > Brightness Adjustment: Yes
- > Material: Plastic + PC
- > LED Chip: SMD2835
- > Installation Method: Clip for surface mounting
- > Fixture Size: 11x12 mm
- > Shelf Reduction: Clips

Can be chosen for surface or embedded mounting; the lamp body face is a lens, with a white opaque area underneath; made of all-plastic material, dust-proof and moisture-proof.


Please regularly wipe with a dry soft cloth to maintain the original surface treatment effect; strong cleaning agents are prohibited.

Voltage	CCT	Power	LED Chip Specification	Color Rendering Index	Product Color
V	K	W/m	SMD	R _a	
12	3000	7.5	SMD2835	>90	Silver
	4000	7.5	SMD2835	>90	
	6000	7.5	SMD2835	>90	

Multi-surface lighting

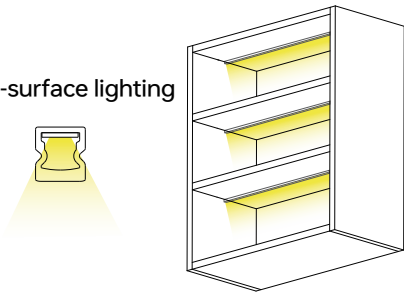

3000 K	4000 K	6000 K		
760 lx	860 lx	840 lx	☀	250 mm
190 lx	215 lx	210 lx	☀	500 mm
85 lx	95 lx	95 lx	☀	750 mm
48 lx	50 lx	50 lx	☀	1000 mm

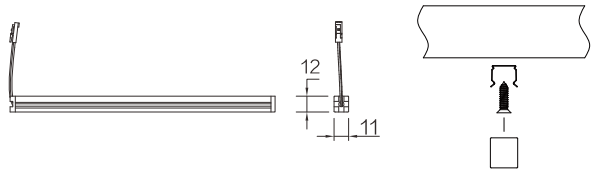

Rear Shelf Light



> Brightness Adjustment: Yes

> Material: Aluminum + PC

> LED Chip: SMD2835

> Installation Method: Rear Shelf

> Fixture Size: 12.7x19 mm

> Suitable Shelves: 18 mm

> Shelf Reduction: 9.5 mm

Minimalist design, reflecting current trends; ultra-narrow light emission, aesthetically pleasing and avoids dust accumulation on fixtures; Available in multiple sizes: 16/18/25, suitable for a wide range; Sturdy aluminum material, no need for slotting, high cost performance.


Please regularly wipe with a dry soft cloth to maintain the original surface treatment effect; strong cleaning agents are prohibited.

Voltage	CCT	Power	LED Chip Specification	Color Rendering Index	Product Color
V	K	W/m	SMD	R _a	
12	3000	7.5	SMD2835	90>	Dark Gray
	4000	7.5	SMD2835	90>	
	6000	7.5	SMD2835	90>	

Up and Down Lighting

3000 K	4000 K	6000 K		
760 lx	860 lx	840 lx		250 mm
190 lx	215 lx	210 lx		500 mm
85 lx	95 lx	95 lx		750 mm
48 lx	50 lx	50 lx		1000 mm

Glass Shelf Light

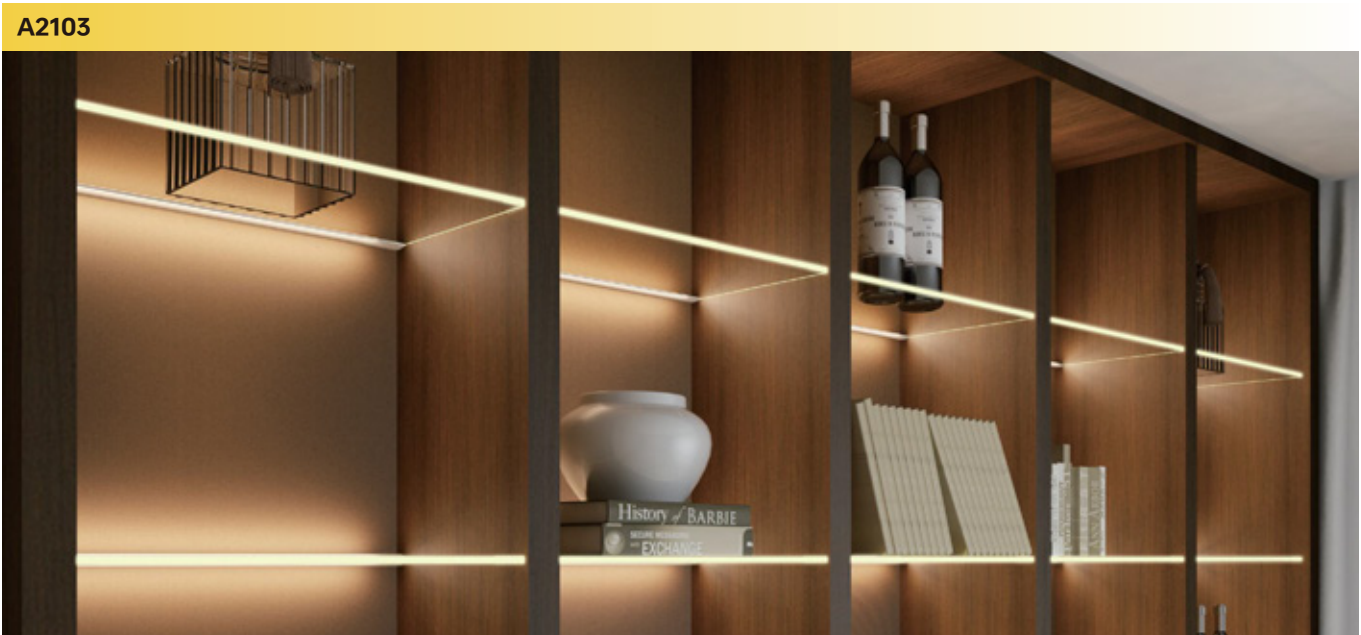

> Brightness Adjustment: Yes

> Material: Aluminum + PC

> LED Chip: SMD2835

> Installation Method: Rear Shelf

> Fixture Size: 25x14 mm

> Suitable Shelves: 6~8 mm

> Shelf Reduction: 17.5 mm

Please regularly wipe with a dry soft cloth to maintain the original surface treatment effect; strong cleaning agents are prohibited.

Please regularly wipe with a dry soft cloth to maintain the original surface treatment effect; strong cleaning agents are prohibited.


Voltage	CCT	Power	LED Chip Specification	Color Rendering Index	Product Color
V	K	W/m	SMD	R _a	
12	3000	7.5	SMD2835	>90	Silver
	4000	7.5	SMD2835	>90	
	6000	7.5	SMD2835	>90	

Up and Down Lighting

3000 K	4000 K	6000 K		
760 lx	860 lx	840 lx		250 mm
190 lx	215 lx	210 lx		500 mm
85 lx	95 lx	95 lx		750 mm
48 lx	50 lx	50 lx		1000 mm

Size parameters are not fixed. We reserve the right to change specifications without prior notice.

Glass Shelf Light

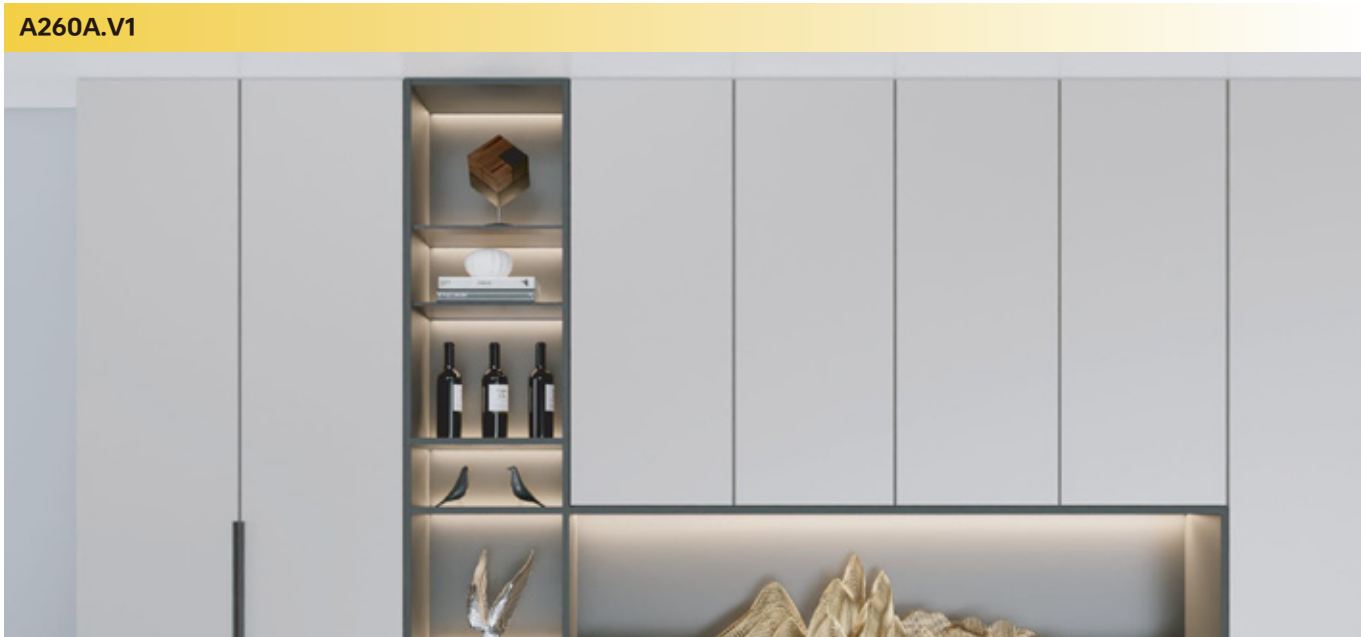

> Brightness Adjustment: Yes

> Material: Aluminum + PC

> LED Chip: SMD2219

> Installation Method: Rear Shelf

> Fixture Size: 11x8.5 mm

> Suitable Shelves: 12mm Shelf or 8mm Glass

> Shelf Reduction: 8 mm

Suitable for installation in cabinet structures with shelves; customizable cutting solutions effectively reduce SKUs and optimize inventory; separated power line for easy installation and maintenance; shelf reduction of 8mm, suitable for 8mm thick glass or 12mm wooden shelves.

Please regularly wipe with a dry soft cloth to maintain the original surface treatment effect; strong cleaning agents are prohibited.

Voltage	CCT	Power	LED Chip Specification	Color Rendering Index	Product Color
V	K	W/m	SMD	R _a	
12	3000	7.5	SMD2219	>90	Galaxy Gray
	4000	7.5	SMD2219	>90	
	6000	7.5	SMD2219	>90	

3000 K 4000 K 6000 K

760 lx	860 lx	840 lx		250 mm
190 lx	215 lx	210 lx		500 mm
85 lx	95 lx	95 lx		750 mm
48 lx	50 lx	50 lx		1000 mm

11

8.5

7

12mm Shelf or 8mm Glass

Reduction: 8mm

35/Front /Rear Shelf Light

ARTCILUX

Glass Shelf Light

> Brightness Adjustment: Yes

> Material: Aluminum + PC

> LED Chip: SMD2219

> Installation Method: Rear Shelf

> Fixture Size: 19x17 mm

> Suitable Shelves: 16-18 mm

> Shelf Reduction: 13 mm

Unique appearance design, Up and Down Lighting, surface light source; Fixture length can be customized, suitable for various home decoration lighting scenarios; 3M adhesive installation, simple and reliable; Separated power line for a safe and reliable power supply.

Please regularly wipe with a dry soft cloth to maintain the original surface treatment effect; strong cleaning agents are prohibited.

Voltage	CCT	Power	LED Chip Specification	Color Rendering Index	Product Color
V	K	W/m	SMD	R _a	
12	3000	7.5	SMD2219	>90	Dark Gray Silver
	4000	7.5	SMD2219	>90	
	6000	7.5	SMD2219	>90	

3000 K 4000 K 6000 K

760 lx	860 lx	840 lx		250 mm
190 lx	215 lx	210 lx		500 mm
85 lx	95 lx	95 lx		750 mm
48 lx	50 lx	50 lx		1000 mm

19

17

13


16-18 laminate

Reduce the size by 13mm

Light Source - Surface Light Source /36

Size parameters are not fixed. We reserve the right to change specifications without prior notice.

Front Shelf Light

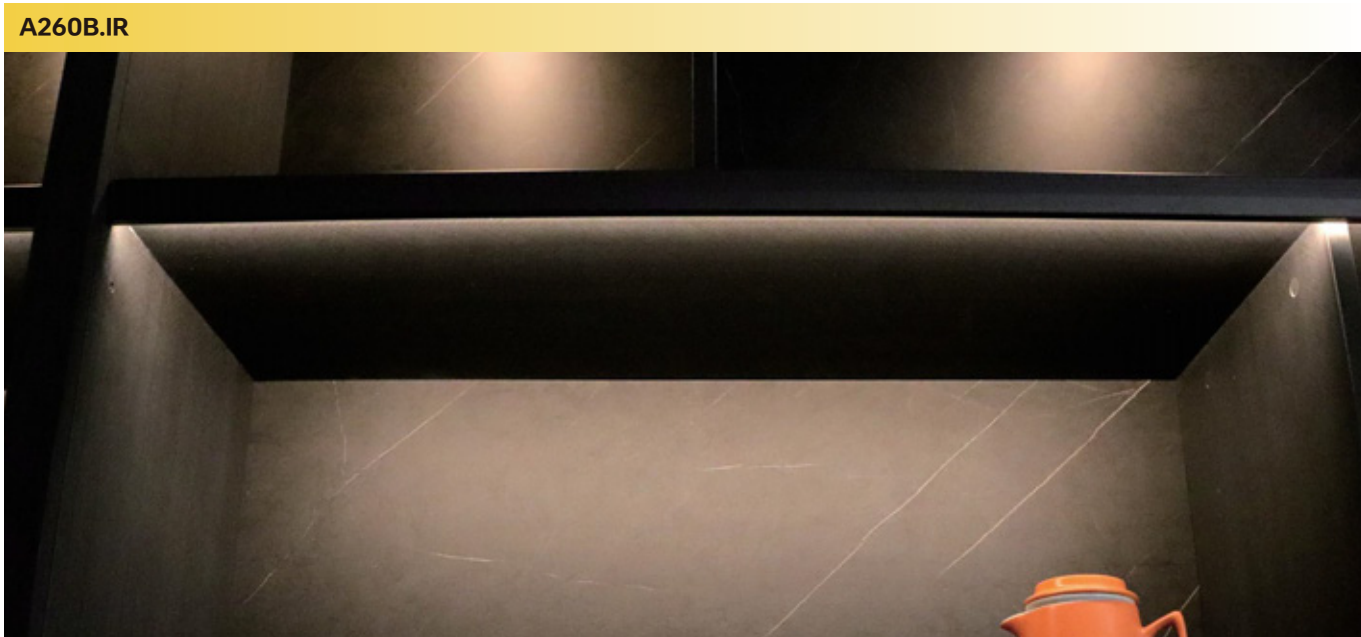

> Brightness Adjustment: No

> Material: Aluminum + PC

> LED Chip: SMD2835

> Installation Method: Front Shelf

> Fixture Size: 11x35 mm

> Suitable Shelves: 18mm

> Shelf Reduction: No

Unique appearance design, up and down lighting, surface light source; 3M adhesive installation, simple and reliable; Fixture length can be customized for various home decor lighting scenarios; separated power line for safe and reliable use.

Please regularly wipe with a dry soft cloth to maintain the original surface treatment effect; strong cleaning agents are prohibited.


Voltage	CCT	Power	LED Chip Specification	Color Rendering Index	Product Color
V	K	W/m	SMD	R _a	
12	3000	7.5	SMD2835	>90	Dark Gray
	4000	7.5	SMD2835	>90	
	6000	7.5	SMD2835	>90	

Custom length

Inward-lighting

3000 K	4000 K	6000 K		
760 lx	860 lx	840 lx		250 mm
190 lx	215 lx	210 lx		500 mm
85 lx	95 lx	95 lx		750 mm
48 lx	50 lx	50 lx		1000 mm

Front Shelf Light

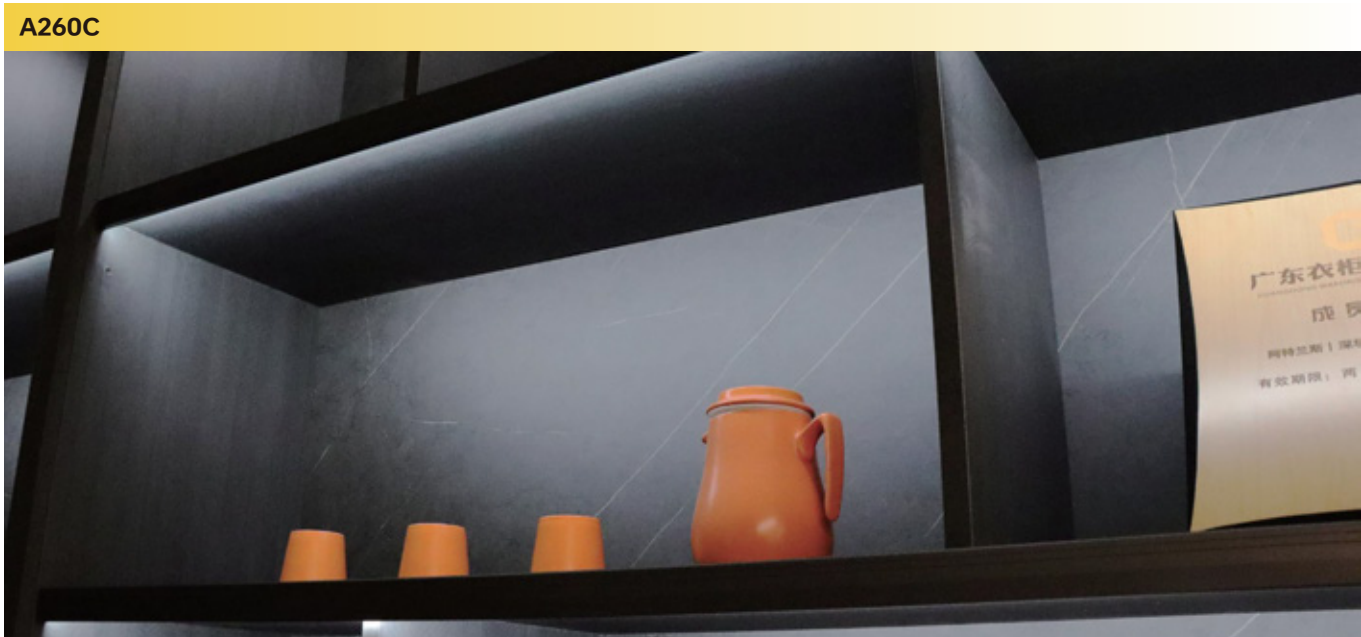

> Brightness Adjustment: Yes

> Material: Aluminum + PC

> LED Chip: SMD2219

> Installation Method: Front Shelf

> Fixture Size: 33.5x15.5 mm

> Suitable Shelves: 16-18 mm

> Shelf Reduction: No

Length can be customized as desired, flexible use; unique design, invisible light source, compatible with furniture without main lights; hidden oblique light emission, ample lighting ; made of high-strength aerospace aluminum, lightweight and durable.

Please regularly wipe with a dry soft cloth to maintain the original surface treatment effect; strong cleaning agents are prohibited.

Voltage	CCT	Power	LED Chip Specification	Color Rendering Index	Product Color
V	K	W/m	SMD	R _a	
12	3000	7.5	SMD2219	>90	Dark Gray Silver
	4000	7.5	SMD2219	>90	
	6000	7.5	SMD2219	>90	

Custom length

Inward-lighting


3000 K	4000 K	6000 K		
760 lx	860 lx	840 lx		250 mm
190 lx	215 lx	210 lx		500 mm
85 lx	95 lx	95 lx		750 mm
48 lx	50 lx	50 lx		1000 mm

Front Mirror Light





Front Mirror Light

A2309.SJ2

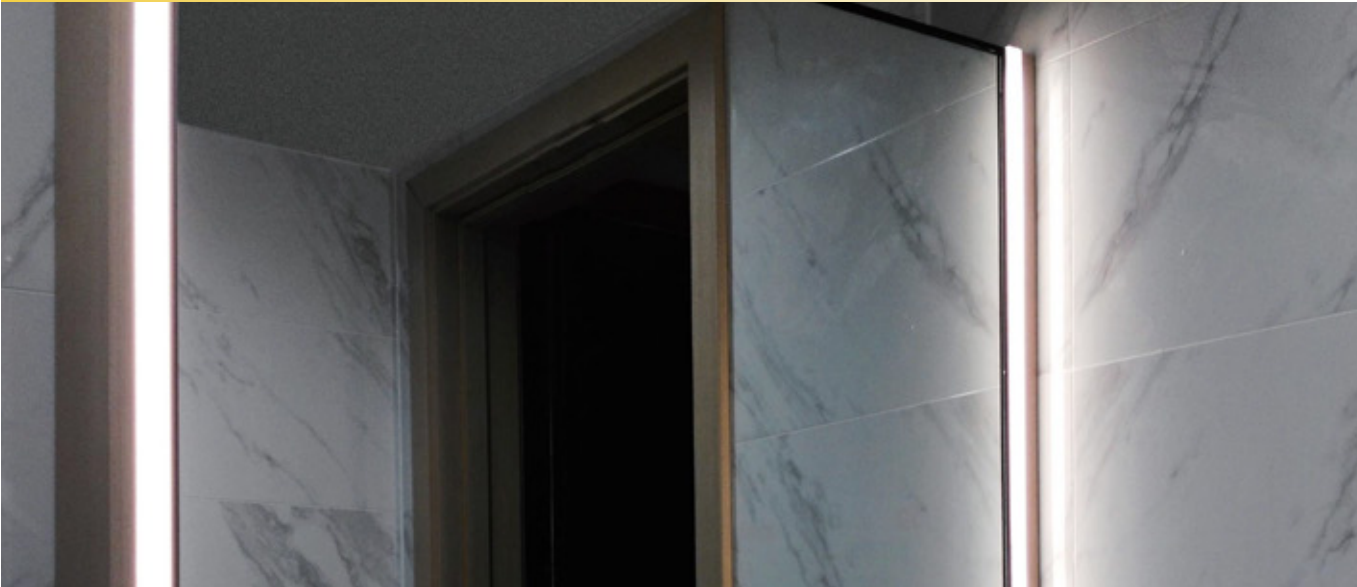

Three-side lighting




- > Brightness Adjustment: Yes
- > Material: Aluminum + PMMA
- > LED Chip: SMD2835
- > Installation Method: Clip for surface mounting
- > Fixture Size: 18x20.3 mm
- > Shelf Reduction: Clips

Clip installation for easy maintenance;
Uses PMMA as the light guiding material to avoid glare;
Aluminum end caps, sturdy and durable;
Simple and convenient, suitable for bathroom cabinets and
makeup mirrors in home environments.

Please regularly wipe with a dry soft cloth to maintain the original
surface treatment effect; strong cleaning agents are prohibited.

Voltage	CCT	Power	LED Chip Specification	Color Rendering Index	Product Color
V	K	W/m	SMD	R _a	
12	3000	7.5	SMD2835	>90	Silver
	4000	7.5	SMD2835	>90	
	6000	7.5	SMD2835	>90	

3000 K	4000 K	6000 K
2150 lx	250mm	
537 lx	500mm	
238 lx	750mm	
134 lx	1000mm	



Size parameters are not fixed. We reserve the right to change specifications without prior notice.

Front Mirror Light




- > Brightness Adjustment: Yes
- > Material: Aluminum + PMMA
- > LED Chip: SMD2835
- > Installation Method: Clip for surface mounting
- > Fixture Size: 16x20.3 mm
- > Standard Accessories: Clips

Clip installation for easy maintenance;
Uses PMMA as the light guiding material to avoid glare;
Aluminum end caps, sturdy and durable;
Simple and convenient, suitable for bathroom cabinets and
makeup mirrors in home environments.


Please regularly wipe with a dry soft cloth to maintain the original
surface treatment effect; strong cleaning agents are prohibited.

Voltage	CCT	Power	LED Chip Specification	Color Rendering Index	Product Color
V	K	W/m	SMD	R _a	
12	3000	7.5	SMD2835	>90	Silver
	4000	7.5	SMD2835	>90	
	6000	7.5	SMD2835	>90	

Three-side lighting

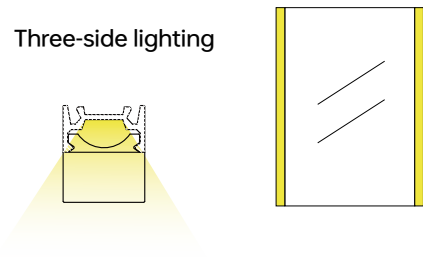

3000 K	4000 K	6000 K	
1466 lx			250mm
366 lx			500mm
162 lx			750mm
91 lx			1000mm



Front Mirror Light




- > Brightness Adjustment: Yes
- > Material: Aluminum + PC
- > LED Chip: SMD2835
- > Installation Method: Clip for surface mounting
- > Fixture Size: 16x20mm
- > Shelf Reduction: Clips

Card installation, easy installation and easy maintenance;
Milky PC cover guide light to avoid dazzling;
Simple and convenient, suitable for bathroom cabinets and
beauty mirrors and other home environment.


Please regularly wipe with a dry soft cloth to maintain the original
surface treatment effect; strong cleaning agents are prohibited.

Voltage	CCT	Power	LED Chip Specification	Color Rendering Index	Product Color
V	K	W/m	SMD	R _a	
12	3000	7.5	SMD2835	>90	Silver
	4000	7.5	SMD2835	>90	
	6000	7.5	SMD2835	>90	

Three-side lighting

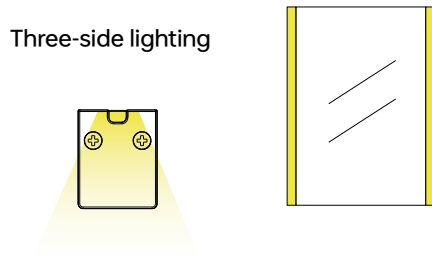

3000 K	4000 K	6000 K	
760 lx	860 lx	840 lx	250 mm
190 lx	215 lx	210 lx	500 mm
85 lx	95 lx	95 lx	750 mm
48 lx	50 lx	50 lx	1000 mm





No-Pull Handle Light

No-Pull Handle Light



- > Brightness Adjustment: Yes
- > Material: Aluminum + PC
- > LED Chip: SMD2835
- > Installation Method: Front panel
- > Fixture Size: 28.3x19.6 mm
- > Suitable Shelves: 18 mm
- > Shelf Reduction: 21.5 mm

Oxidized silver, black, space gray available; colors customizable;
No-pull handle design for 18mm wood boards;
Light emits downward, providing soft light;
Can be equipped with a Mini hand-sweep switch.

Please regularly wipe with a dry soft cloth to maintain the original surface treatment effect; strong cleaning agents are prohibited.

Voltage	CCT	Power	LED Chip Specification	Color Rendering Index	Product Color
V	K	W/m	SMD	R _a	
12	3000	7.5	SMD2835	>90	Galaxy Gray Black
	4000	7.5	SMD2835	>90	
	6000	7.5	SMD2835	>90	

3000 K 4000 K 6000 K

760 lx	860 lx	840 lx		250 mm
190 lx	215 lx	210 lx		500 mm
85 lx	95 lx	95 lx		750 mm
48 lx	50 lx	50 lx		1000 mm

Shelf Reduction:-21.5mm

ARTCILUX

No-Pull Handle Light

- > Brightness Adjustment: Yes
- > Material: Aluminum + PC
- > LED Chip: SMD2835
- > Installation Method: Front panel
- > Fixture Size: 40x18.5 mm
- > Suitable Shelves: 16 mm
- > Shelf Reduction: 30 mm

Hands-free design, light only downward irradiation;
No light point, the light will not be too dazzling;
Embedded installation, lateral plate installation;
Length can be customized according to requirements.

Please regularly wipe with a dry soft cloth to maintain the original surface treatment effect; strong cleaning agents are prohibited.

Voltage	CCT	Power	LED Chip Specification	Color Rendering Index	Product Color
V	K	W/m	SMD	R _a	
12	3000	7.5	SMD2835	>90	Silver Iron Gray
	4000	7.5	SMD2835	>90	
	6000	7.5	SMD2835	>90	

3000 K 4000 K 6000 K

760 lx	860 lx	840 lx		250 mm
190 lx	215 lx	210 lx		500 mm
85 lx	95 lx	95 lx		750 mm
48 lx	50 lx	50 lx		1000 mm

Shelf Reduction:-30mm

45/No-Pull Handle Light

No-Pull Handle Light/46

Size parameters are not fixed. We reserve the right to change specifications without prior notice.



Pull-out Basket Sterilization Light

Pull-out Basket Sterilization Light



> Brightness Adjustment: Yes

> Material: Aluminum + PC

> LED Chip: SMD2835

> Installation Method: Open installation

> Fixture Size: 40x8.6 mm

> Standard Configuration: Screws

User-friendly surface light source design illuminates drawers at maximum angle; UVC-LED ultraviolet disinfection, two-hour timer for effective sterilization;

Aerospace-grade precision-crafted 8.5mm ultra-thin aluminum lamp body; intelligent door sensing , convenient for retrieving items, anytime; 48-hour intelligent cycling disinfection, safe and healthy.

Please regularly wipe with a dry soft cloth to maintain the original surface treatment effect; strong cleaning agents are prohibited.

Voltage	CCT	Power	LED Chip Specification	Color Rendering Index	Product Color
V	K	W/m	SMD	R _a	
12	3000	7.5	SMD2835	>90	Galaxy Gray Black
	4000	7.5	SMD2835	>90	
	6000	7.5	SMD2835	>90	

3000 K 4000 K 6000 K

760 lx	860 lx	840 lx		250 mm
190 lx	215 lx	210 lx		500 mm
85 lx	95 lx	95 lx		750 mm
48 lx	50 lx	50 lx		1000 mm

Pull-out Basket Sterilization Light



> Brightness Adjustment: Yes

> Material: Aluminum + PC

> LED Chip: SMD2835

> Installation Method: Front panel

> Fixture Size: 37.5x9.6 mm

> Standard Configuration: Screws

Compact and ultra-thin appearance, dual-purpose for sterilization and lighting; User-friendly surface light source design illuminates drawers at maximum angle; Door sensing, lights up when drawer is opened, turns off when closed, and auto-sterilizes after 5 seconds;

UV version uses UVC-LED sterilization principle, eco-friendly and long-lasting.

Please regularly wipe with a dry soft cloth to maintain the original surface treatment effect; strong cleaning agents are prohibited.

Voltage	CCT	Power	LED Chip Specification	Color Rendering Index	Product Color
V	K	W/m	SMD	R _a	
12	3000	7.5	SMD2835	>90	Silver Iron Gray
	4000	7.5	SMD2835	>90	
	6000	7.5	SMD2835	>90	

3000 K 4000 K 6000 K


760 lx	860 lx	840 lx		250 mm
190 lx	215 lx	210 lx		500 mm
85 lx	95 lx	95 lx		750 mm
48 lx	50 lx	50 lx		1000 mm



PIR / Human Body Sensing Wardrobe Light

Wardrobe Light



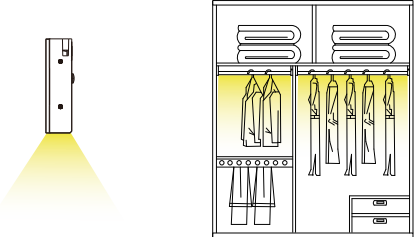


 > Brightness Adjustment: Yes
> Material: Aluminum + PC
> LED Chip: SMD2835
> Installation Method: Top mounting/side mounting
> Fixture Size: 21x83.5 mm
> Shelf Reduction: Screws, Accessories

 Light is soft and comfortable, preventing glare;
Body sensing switch, lights up when someone is near;
Two installation methods: top mount and side mount;
Maximum load for a one-meter wardrobe light rod is ≤30kg.

 Please regularly wipe with a dry soft cloth to maintain the original surface treatment effect; strong cleaning agents are prohibited.



Voltage	CCT	Power	LED Chip Specification	Color Rendering Index	Product Color
V	K	W/m	SMD	R _a	
12	3000	7.5	SMD2835	>90	Silver
	4000	7.5	SMD2835	>90	
	6000	7.5	SMD2835	>90	

3000 K	4000 K	6000 K		
760 lx	860 lx	840 lx		250 mm
190 lx	215 lx	210 lx		500 mm
85 lx	95 lx	95 lx		750 mm
48 lx	50 lx	50 lx		1000 mm

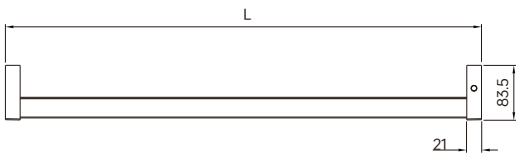

Wardrobe Light



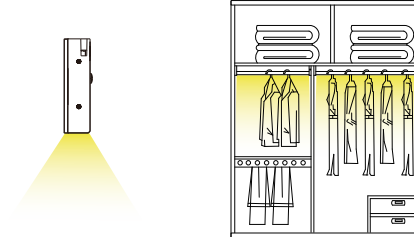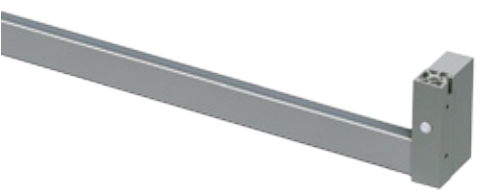


 > Brightness Adjustment: Yes
> Material: Aluminum + PC
> LED Chip: SMD2835
> Installation Method: Top mounting/side mounting
> Fixture Size: 21x83.5 mm
> Shelf Reduction: Screws, Accessories

 Battery version, no wire needed;
Light is soft and comfortable, preventing glare;
Body sensing switch, lights up when someone is near;
Two installation methods: top mount and side mount;
Maximum load for a one-meter wardrobe light rod is ≤30kg.

 Please regularly wipe with a dry soft cloth to maintain the original surface treatment effect; strong cleaning agents are prohibited.

Voltage	CCT	Power	LED Chip Specification	Color Rendering Index	Product Color
V	K	W/m	SMD	R _a	
3.7	3000	2	SMD2835	>90	Silver
	4000	2	SMD2835	>90	
	6000	2	SMD2835	>90	

3000 K	4000 K	6000 K		
760 lx	860 lx	840 lx		250 mm
190 lx	215 lx	210 lx		500 mm
85 lx	95 lx	95 lx		750 mm
48 lx	50 lx	50 lx		1000 mm

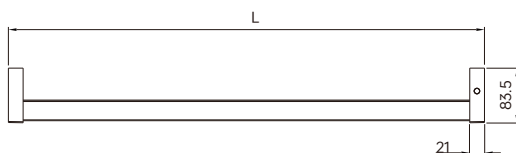



Surface-Mounted Under Cabinet Light

Under Cabinet Light





> Brightness Adjustment: Yes

> Material: Aluminum + PC

> LED Chip: SMD2835

> Installation Method: Surface Mounted

> Fixture Size: 40x11 mm

> Standard Configuration: Clips, 3M Adhesive

Built-in hand-sweep sensing switch, lights up with a wave;

Separated power line for easy maintenance and removal;



Suitable for installation on the under panel of cabinets as supplementary lighting;

Milky white PC lamp cover for light guiding, providing soft light without glare.


Please regularly wipe with a dry soft cloth to maintain the original surface treatment effect; strong cleaning agents are prohibited.

Voltage	CCT	Power	LED Chip Specification	Color Rendering Index	Product Color
V	K	W/m	SMD	R _a	
12	3000	7.5*2	SMD2835	>90	Silver
	4000	7.5*2	SMD2835	>90	
	6000	7.5*2	SMD2835	>90	

Downward Lighting



3000 K	4000 K	6000 K
2857 lx	714 lx	317 lx
250mm	500mm	750mm
178 lx		
		1000mm



Under Cabinet Light





> Brightness Adjustment: Yes

> Material: Aluminum + PC

> LED Chip: SMD2010

> Installation Method: Surface Mounted

> Fixture Size: 600/900x229x14.5 mm

> Standard Configuration: Screws

Can be installed with no gap between the cabinet and the wall;

Ultra-thin design, surface light source;

Hand-sweep switch and non-switch options available;


Single and dual-color temperatures available, dual-color can achieve stepless color temperature adjustment and color temperature loss protection;

Can be spliced, can install hanging brackets, brackets can slide freely.


Please regularly wipe with a dry soft cloth to maintain the original surface treatment effect; strong cleaning agents are prohibited.

Voltage	CCT	Power	LED Chip Specification	Color Rendering Index	Product Color
V	K	W/m	SMD	R _a	
12	3000~6000	8.5/13	SMD2010	>90	Silver

Downward Lighting



3000 K	4000 K	6000 K
760 lx	860 lx	840 lx
190 lx	215 lx	210 lx
85 lx	95 lx	95 lx
48 lx	50 lx	50 lx

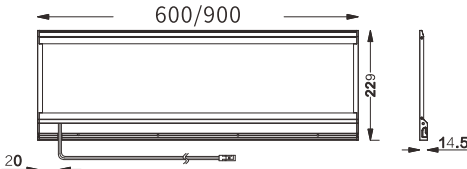

Panel Light



A4P02






- > Brightness Adjustment: Supports RGBW Adjustment
- > Material: Aluminum + PC
- > LED Chip: SMD2835
- > Installation Method: Surface Mounted
- > Fixture Size: 464-2404x13 mm
- > Standard Configuration: Screws

Surface soft light, no flicker;
Dual-color mixed light, color can be customized;
256 color mixing modes available;
A quality choice for both lighting and ambiance.

Please regularly wipe with a dry soft cloth to maintain the original surface treatment effect; strong cleaning agents are prohibited.

Voltage	CCT	Power	LED Chip Specification	Color Rendering Index	Product Color
V	K	W/m	SMD	R _a	
12	RGB	10	SMD2835	>90	Black




Size parameters are not fixed. We reserve the right to change specifications without prior notice.



Skirting Light

Skirting Light





> Brightness Adjustment: Yes

> Material: Aluminum + PC

> LED Chip: SMD2835

> Installation Method: Surface-mounted

> Fixture Size: 10x80 mm

> Standard Accessories: Inner Corner, Outer Corner, Flat Corner

 Length can be customized according to needs;
Optional 27mm/47mm skirting board clips;
Choose between inner corner, outer corner, and flat corner for assembly;
Suitable for local lighting at the base of cabinets, wardrobes, display cases, etc.

 Please regularly wipe with a dry soft cloth to maintain the original surface treatment effect; strong cleaning agents are prohibited.


Voltage	CCT	Power	LED Chip Specification	Color Rendering Index	Product Color
V	K	W/m	SMD	R _a	
12	3000	7.5	SMD2835	>90	Dark Gray
	4000	7.5	SMD2835	>90	
	6000	7.5	SMD2835	>90	

3000 K	4000 K	6000 K		
760 lx	860 lx	840 lx		250 mm
190 lx	215 lx	210 lx		500 mm
85 lx	95 lx	95 lx		750 mm
48 lx	50 lx	50 lx		1000 mm



Skirting Light





> Brightness Adjustment: Yes

> Material: Aluminum + PC

> LED Chip: SMD2835

> Installation Method: Surface-mounted

> Fixture Size: 10x100 mm

> Standard Accessories: Inner Corner, Outer Corner, Flat Corner

 Length can be customized according to needs;
Optional 27mm/47mm skirting board clips;
Choose between inner corner, outer corner, and flat corner for assembly;
Suitable for local lighting at the base of cabinets, wardrobes, display cases, etc.

 Please regularly wipe with a dry soft cloth to maintain the original surface treatment effect; strong cleaning agents are prohibited.

Voltage	CCT	Power	LED Chip Specification	Color Rendering Index	Product Color
V	K	W/m	SMD	R _a	
12	3000	7.5	SMD2835	>90	Dark Gray
	4000	7.5	SMD2835	>90	
	6000	7.5	SMD2835	>90	

3000 K	4000 K	6000 K		
760 lx	860 lx	840 lx		250 mm
190 lx	215 lx	210 lx		500 mm
85 lx	95 lx	95 lx		750 mm
48 lx	50 lx	50 lx		1000 mm




Size parameters are not fixed. We reserve the right to change specifications without prior notice.



Flexible Strip Light


Flexible Strip Light

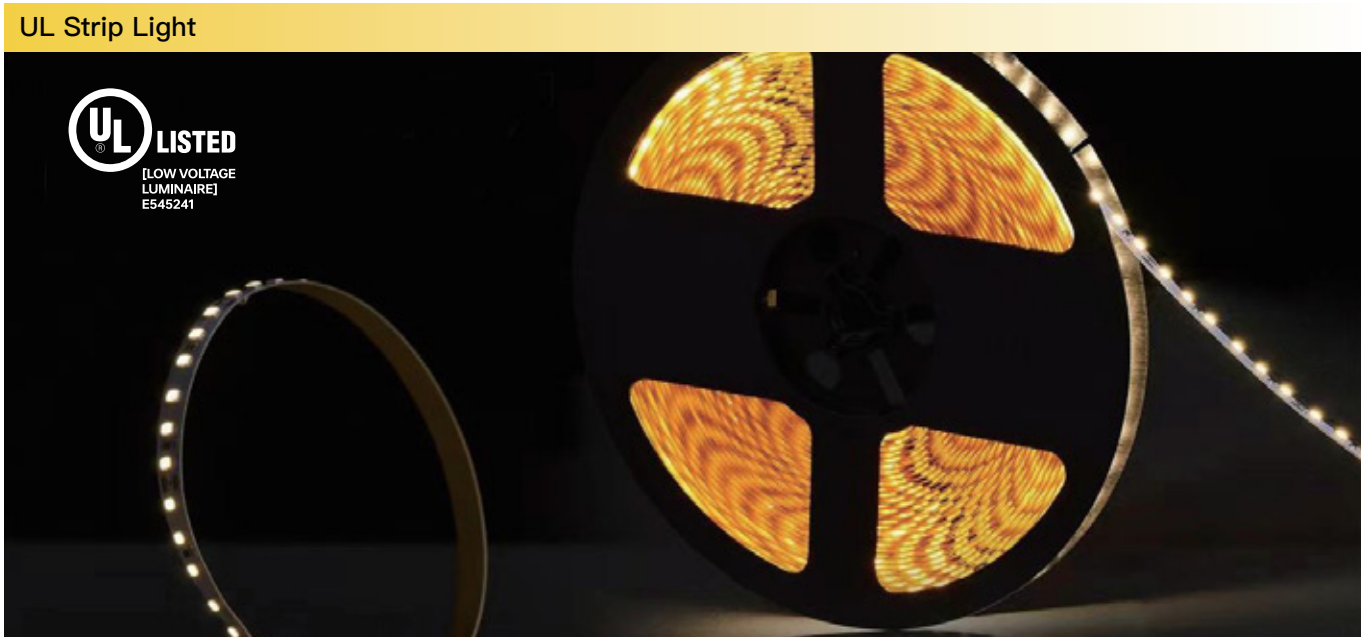

- > Brightness Adjustment: Yes
- > LED Chip: SMD2835
- > Installation Method: Back Adhesive 3M for Surface Mounting
- > Fixture Size: 5 mm


Light effect is soft and comfortable, not glaring;
Can be pasted and fixed, length can be customized;
Available in waterproof and non-waterproof options.

Installation and maintenance should be carried out by professionals.

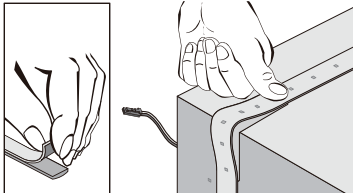

Voltage	CCT	Power	LED Chip Specification	Color Rendering Index	
V	K	W/m	SMD	R _a	
12	3000	7.5-10	SMD2835	95>	
	4000	7.5-10	SMD2835	95>	
	6000	7.5-10	SMD2835	95>	

3000 K	4000 K	6000 K
3090 lx	772 lx	343 lx
250mm	500mm	750mm
193 lx		
		1000mm

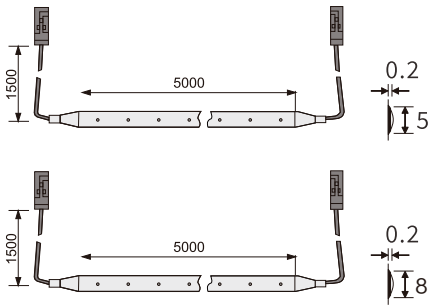


A2901



- > Brightness Adjustment: Yes
- > LED Chip: SMD2835
- > Installation Method: Back Adhesive 3M for Surface Mounting
- > Fixture Size: 5 mm


Light effect is soft and comfortable, not glaring;
Can be pasted and fixed, length can be customized;
Available in waterproof and non-waterproof options.

Installation and maintenance should be carried out by professionals.

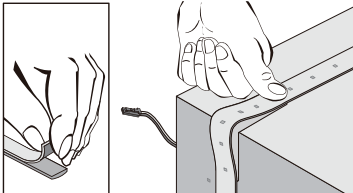

Voltage	CCT	Power	LED Chip Specification	Color Rendering Index	
V	K	W/m	SMD	R _a	
12	3000	7.5	SMD2835	90>	
	4000	7.5	SMD2835	90>	
	6000	7.5	SMD2835	90>	

3000 K	4000 K	6000 K
3090 lx	772 lx	343 lx
250mm	500mm	750mm
193 lx		
		1000mm

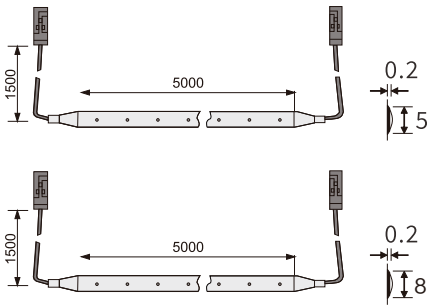

Silicone Flexible Strip Light





> Brightness Adjustment: Yes

> LED Chip: SMD2835

> Installation Method: Back Adhesive 3M for Surface Mounting

> Fixture Size: 5x8 mm

Light effect is soft and comfortable, not glaring;
Can be pasted and fixed, length can be customized;
IP44 level waterproof silicone.

Installation and maintenance should be carried out by professionals.

Voltage	CCT	Power	LED Chip Specification	Color Rendering Index	
V	K	W/m	SMD	R _a	
12	3000	8.5	SMD2835	>90	
	4000	8.5	SMD2835	>90	
	6000	8.5	SMD2835	>90	



Silicone Flexible Strip Light





> Brightness Adjustment: Yes

> LED Chip: SMD2835


> Installation Method: Back Adhesive 3M for Surface Mounting

> Fixture Size: 4x10 mm

Light effect is soft and comfortable, not glaring;
Can be pasted and fixed, length can be customized;
IP44 level waterproof silicone.

Installation and maintenance should be carried out by professionals.

Voltage	CCT	Power	LED Chip Specification	Color Rendering Index	
V	K	W	SMD	R _a	
12	3000	3.5	SMD2835	>90	
	4000	3.5	SMD2835	>90	
	6000	3.5	SMD2835	>90	

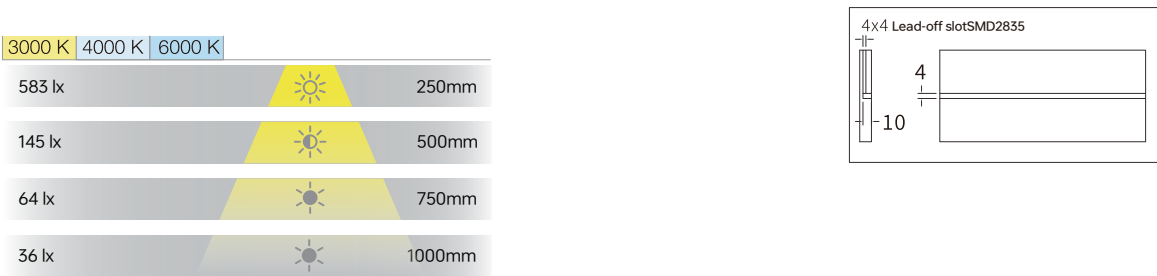




Spotlight

Round Recessed Spotlight



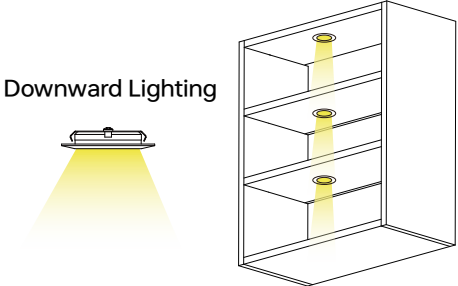

> Brightness Adjustment: Yes

> Material: Aluminum + PS

> LED Chip: SMD2835

> Installation Method: Embedded in Hole



> Fixture Size: $\phi 70 \times 15$ mm

> Hole Size: $\phi 56 \times 12$ mm


 Aerospace-grade aluminum, excellent heat dissipation; Attractive appearance of the lamp; Options for constant light, PIR sensing, and hand-sweep sensing; Surface light source, emits soft and comfortable light without glare.


 Please regularly wipe with a dry soft cloth to maintain the original surface treatment effect; strong cleaning agents are prohibited.

Voltage	CCT	Power	LED Chip Specification	Color Rendering Index	Product Color
V	K	W	SMD	R _a	
12	3000	1	SMD2835	>90	Silver
	4000	1	SMD2835	>90	
	6000	1	SMD2835	>90	

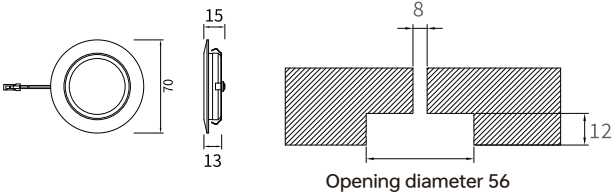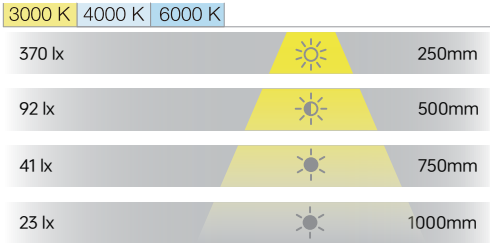

Round Recessed Spotlight

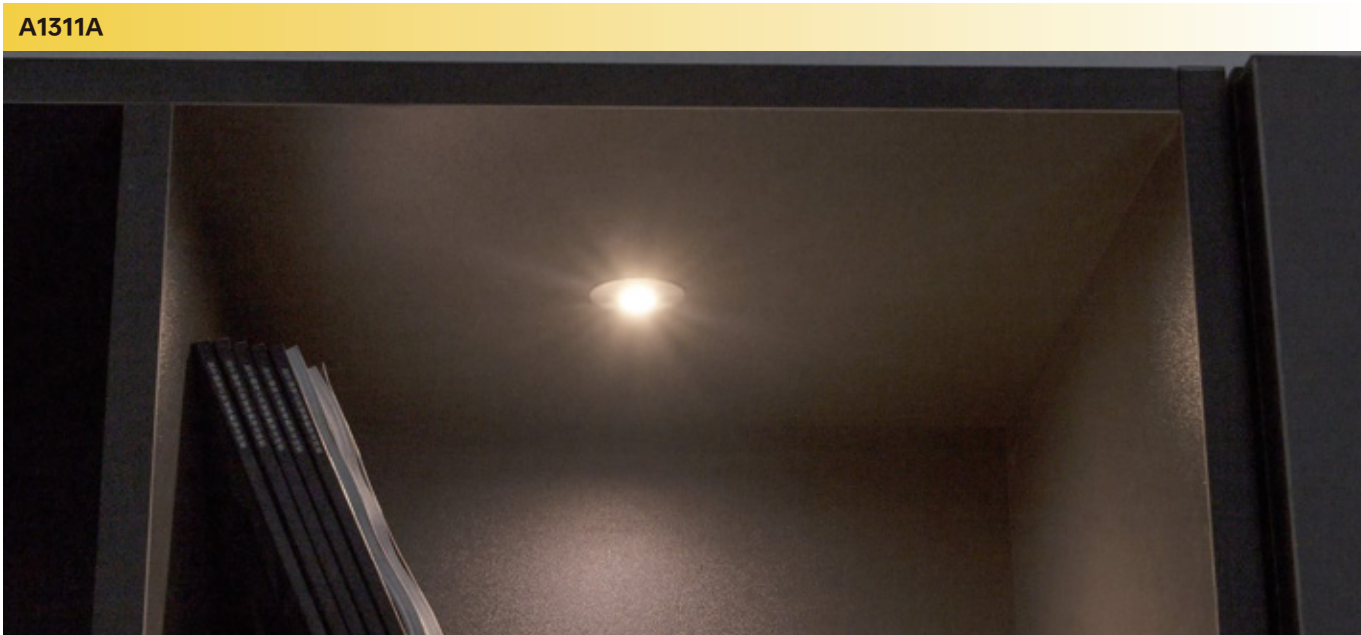

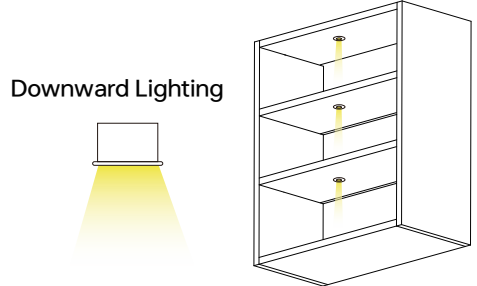

> Brightness Adjustment: Yes

> Material: Aluminum + PMMA

> LED Chip: SMD2835

> Installation Method: Embedded in Hole



> Fixture Size: $\phi 20 \times 12.5$ mm

> Hole Size: $\phi 19 \times 14$ mm

 Compact design, seamlessly integrated with the shelf; Uses high-brightness LEDs, energy-saving, and long-lasting; Easy embedded installation with the cut-out diameter of 19mm; Suitable for local lighting in cabinets, wardrobes, display cases, etc.

 Please regularly wipe with a dry soft cloth to maintain the original surface treatment effect; strong cleaning agents are prohibited.

Voltage	CCT	Power	LED Chip Specification	Color Rendering Index	Product Color
V	K	W	SMD	R _a	
12	3000	0.7	SMD2835	>90	Silver
	4000	0.7	SMD2835	>90	
	6000	0.7	SMD2835	>90	

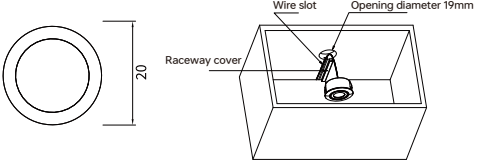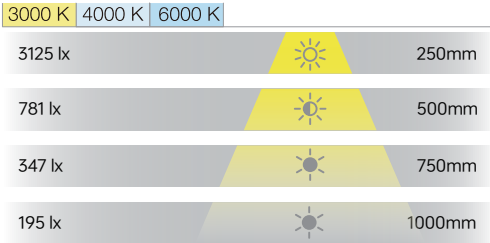

Size parameters are not fixed. We reserve the right to change specifications without prior notice.

Round Surface mounted Spotlight





- > Brightness Adjustment: Yes
- > Material: Aluminum + PS
- > LED Chip: SMD2835
- > Installation Method: Surface mounted
- > Fixture Size: $\phi 60 \times 10$ mm
- > Standard Configuration: 3M glue/magnetic accessories

Surface mounted magnetic mounting;
Light line separation, convenient maintenance;
PMMA light guide structure, soft light without glare;
Suitable for cabinets, wardrobes, showcases and other atmosphere lighting.



Please regularly wipe with a dry soft cloth to maintain the original surface treatment effect; strong cleaning agents are prohibited.

Voltage	CCT	Power	LED Chip Specification	Color Rendering Index	Product Color
V	K	W	SMD	R _a	
12	3000	1.5	SMD2835	>90	Silver
	4000	1.5	SMD2835	>90	
	6000	1.5	SMD2835	>90	

Downward Lighting

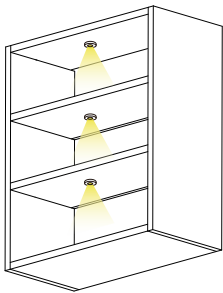

3000 K	4000 K	6000 K		
760 lx	860 lx	840 lx		250 mm
190 lx	215 lx	210 lx		500 mm
85 lx	95 lx	95 lx		750 mm
48 lx	50 lx	50 lx		1000 mm



Round Surface mounted Spotlight





- > Brightness Adjustment: Yes
- > Material: Aluminum + PS
- > LED Chip: SMD2835
- > Installation Method: Surface mounted
- > Fixture Size: $\phi 50 \times 7.8$ mm
- > Hole Size: Magnetic accessories

Ultra-thin design, only 7.8mm thickness;
Milky white mask, surface light source, soft light;
All aluminum lamp body, better heat dissipation performance;
Magnetic installation, easy installation.


Please regularly wipe with a dry soft cloth to maintain the original surface treatment effect; strong cleaning agents are prohibited.

Voltage	CCT	Power	LED Chip Specification	Color Rendering Index	Product Color
V	K	W	SMD	R _a	
12	3000	1.7	SMD2835	>90	Silver
	4000	1.7	SMD2835	>90	
	6000	1.7	SMD2835	>90	


Downward Lighting



3000 K	4000 K	6000 K		
760 lx	860 lx	840 lx		250 mm
190 lx	215 lx	210 lx		500 mm
85 lx	95 lx	95 lx		750 mm
48 lx	50 lx	50 lx		1000 mm

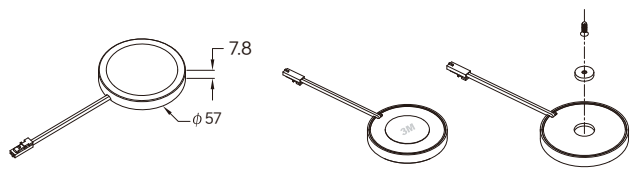

Round Recessed Spotlight

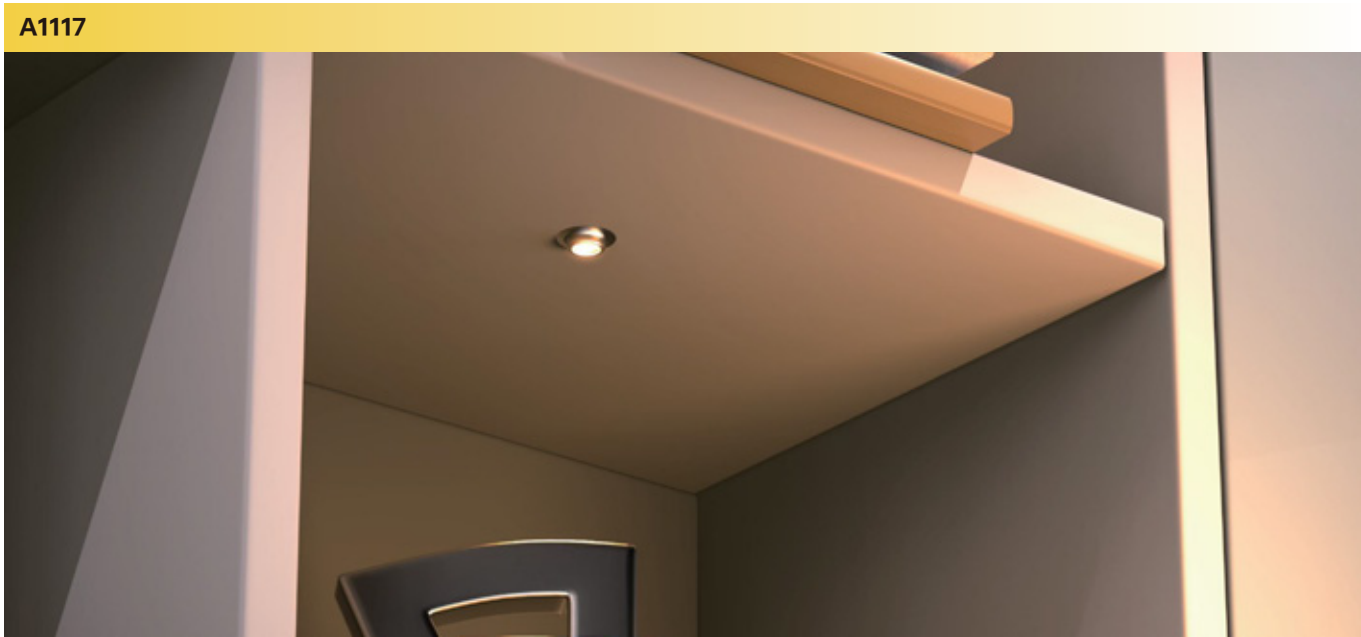


- > Brightness Adjustment: Yes
- > Material: Aluminum + PC
- > LED Chip: SMD3030
- > Installation Method: Embedded in Hole
- > Fixture Size: $\phi 28 \times 18.7$ mm
- > Hole Size: $\phi 25 \times 12$ mm

The rotation Angle is adjustable from 0 to 30 degrees, and the beam Angle is adjustable from 15 to 60 degrees; Product appearance novel, easy to install; Radiator for aviation aluminum material, heat dissipation is very good; The luminaire supports built-in installation.

Please regularly wipe with a dry soft cloth to maintain the original surface treatment effect; strong cleaning agents are prohibited.





Voltage	CCT	Power	LED Chip Specification	Color Rendering Index	Product Color
V	K	W	SMD	R _a	
12	3000	1W	SMD3030	>90	Dark Gray
	4000	1W	SMD3030	>90	
	6000	1W	SMD3030	>90	

Downward Lighting

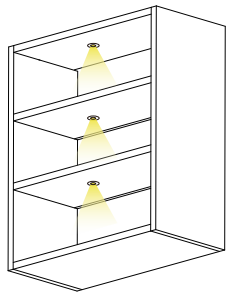

3000 K 4000 K 6000 K


760 lx	860 lx	840 lx		250 mm
190 lx	215 lx	210 lx		500 mm
85 lx	95 lx	95 lx		750 mm
48 lx	50 lx	50 lx		1000 mm



Rotation Angle 0~30°

Beam Angle 15~60°

Round Recessed Spotlight

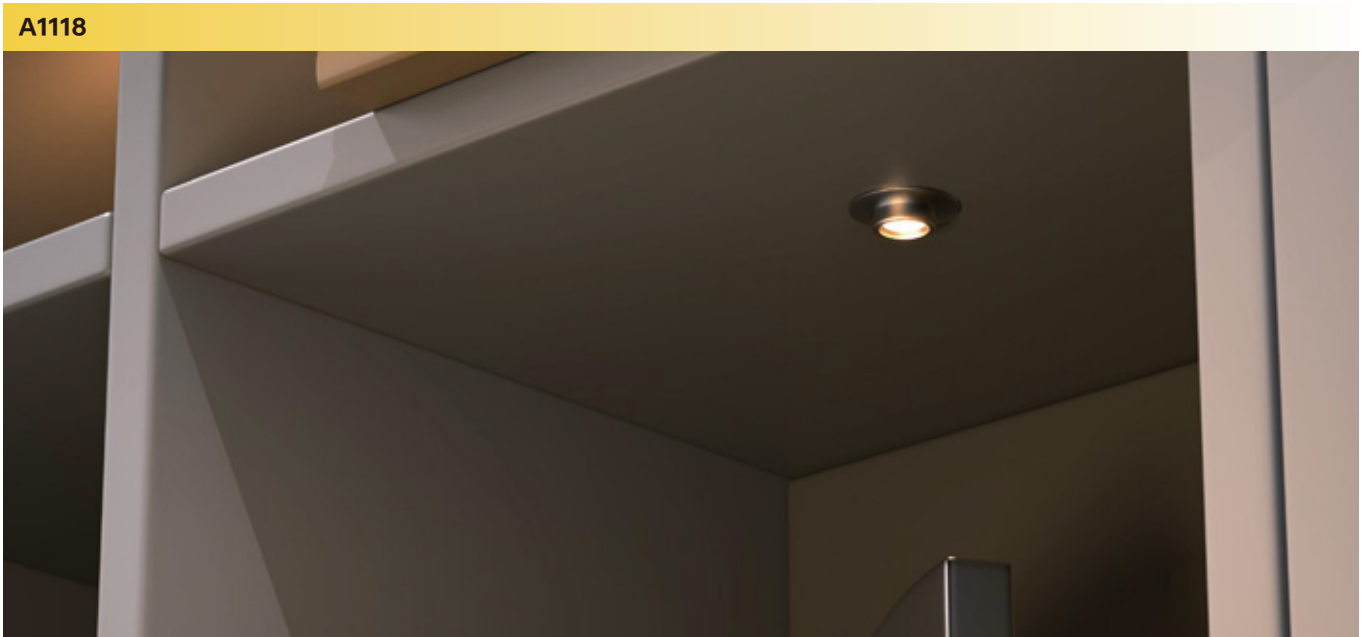



- > Brightness Adjustment: Yes
- > Material: Aluminum + PC
- > LED Chip: SMD3030
- > Installation Method: Embedded in Hole
- > Fixture Size: $\phi 25 \times 18$ mm
- > Hole Size: $\phi 20 \times 12$ mm

Beam Angle 15~60 degrees can be focused; Product appearance novel, easy to install; Radiator for aviation aluminum material, heat dissipation is very good; The luminaire supports built-in installation.

Please regularly wipe with a dry soft cloth to maintain the original surface treatment effect; strong cleaning agents are prohibited.





Voltage	CCT	Power	LED Chip Specification	Color Rendering Index	Product Color
V	K	W	SMD	R _a	Silver
12	3000	1W	SMD3030	>90	Dark Gray
	4000	1W	SMD3030	>90	
	6000	1W	SMD3030	>90	

Downward Lighting



3000 K 4000 K 6000 K

760 lx	860 lx	840 lx		250 mm
190 lx	215 lx	210 lx		500 mm
85 lx	95 lx	95 lx		750 mm
48 lx	50 lx	50 lx		1000 mm



Beam Angle 15~60°

Recessed / Surface-Mounted Spotlight



> Brightness Adjustment: Yes

> Material: Aluminum + PC

> LED Chip: SMD2835

> Installation Method: Surface Mounted/Embedded

> Fixture Size: $\phi 76 \times 10$ mm

> Hole Size: $\phi 70 \times 12$ mm

> Standard Accessories: Surface Mount Accessories

Supports both embedded and surface mounting options;

Ultra-thin design, aesthetically pleasing installation;

12V safe low-voltage drive, reliable and durable;

Surface emission, uniform light output, comfortable illumination;

Heat sink made of high-grade aerospace aluminum, excellent performance.

Please regularly wipe with a dry soft cloth to maintain the original surface treatment effect; strong cleaning agents are prohibited.

Voltage	CCT	Power	LED Chip Specification	Color Rendering Index	Product Color
V	K	W	SMD	R _a	
12	3000	2.5	SMD2835	>90	Black
	4000	2.5	SMD2835	>90	White
	6000	2.5	SMD2835	>90	Silver

Downward Lighting

3000 K	4000 K	6000 K
550 lx	534 lx	
137 lx	133 lx	
61 lx	59 lx	
34 lx	33 lx	

Recessed / Surface-Mounted Spotlight



> Brightness Adjustment: Yes

> Material: Aluminum + PC

> LED Chip: SMD2835

> Installation Method: Surface Mounted/Embedded

> Fixture Size: L76x76x10 mm

> Hole Size: L70xW70 mm

> Standard Accessories: Surface Mount Accessories

Supports both embedded and surface mounting options;

Ultra-thin design, aesthetically pleasing installation;

12V safe low-voltage drive, reliable and durable;

Surface emission, uniform light output, comfortable illumination;


Heat sink made of high-grade aerospace aluminum, excellent performance.

Please regularly wipe with a dry soft cloth to maintain the original surface treatment effect; strong cleaning agents are prohibited.

Voltage	CCT	Power	LED Chip Specification	Color Rendering Index	Product Color
V	K	W	SMD	R _a	
12	3000	1.7	SMD2835	>90	Black
	4000	1.7	SMD2835	>90	White
	6000	1.7	SMD2835	>90	Silver

Downward Lighting

3000 K	4000 K	6000 K
600 lx	541 lx	
150 lx	135 lx	
66 lx	60 lx	
37 lx	33 lx	

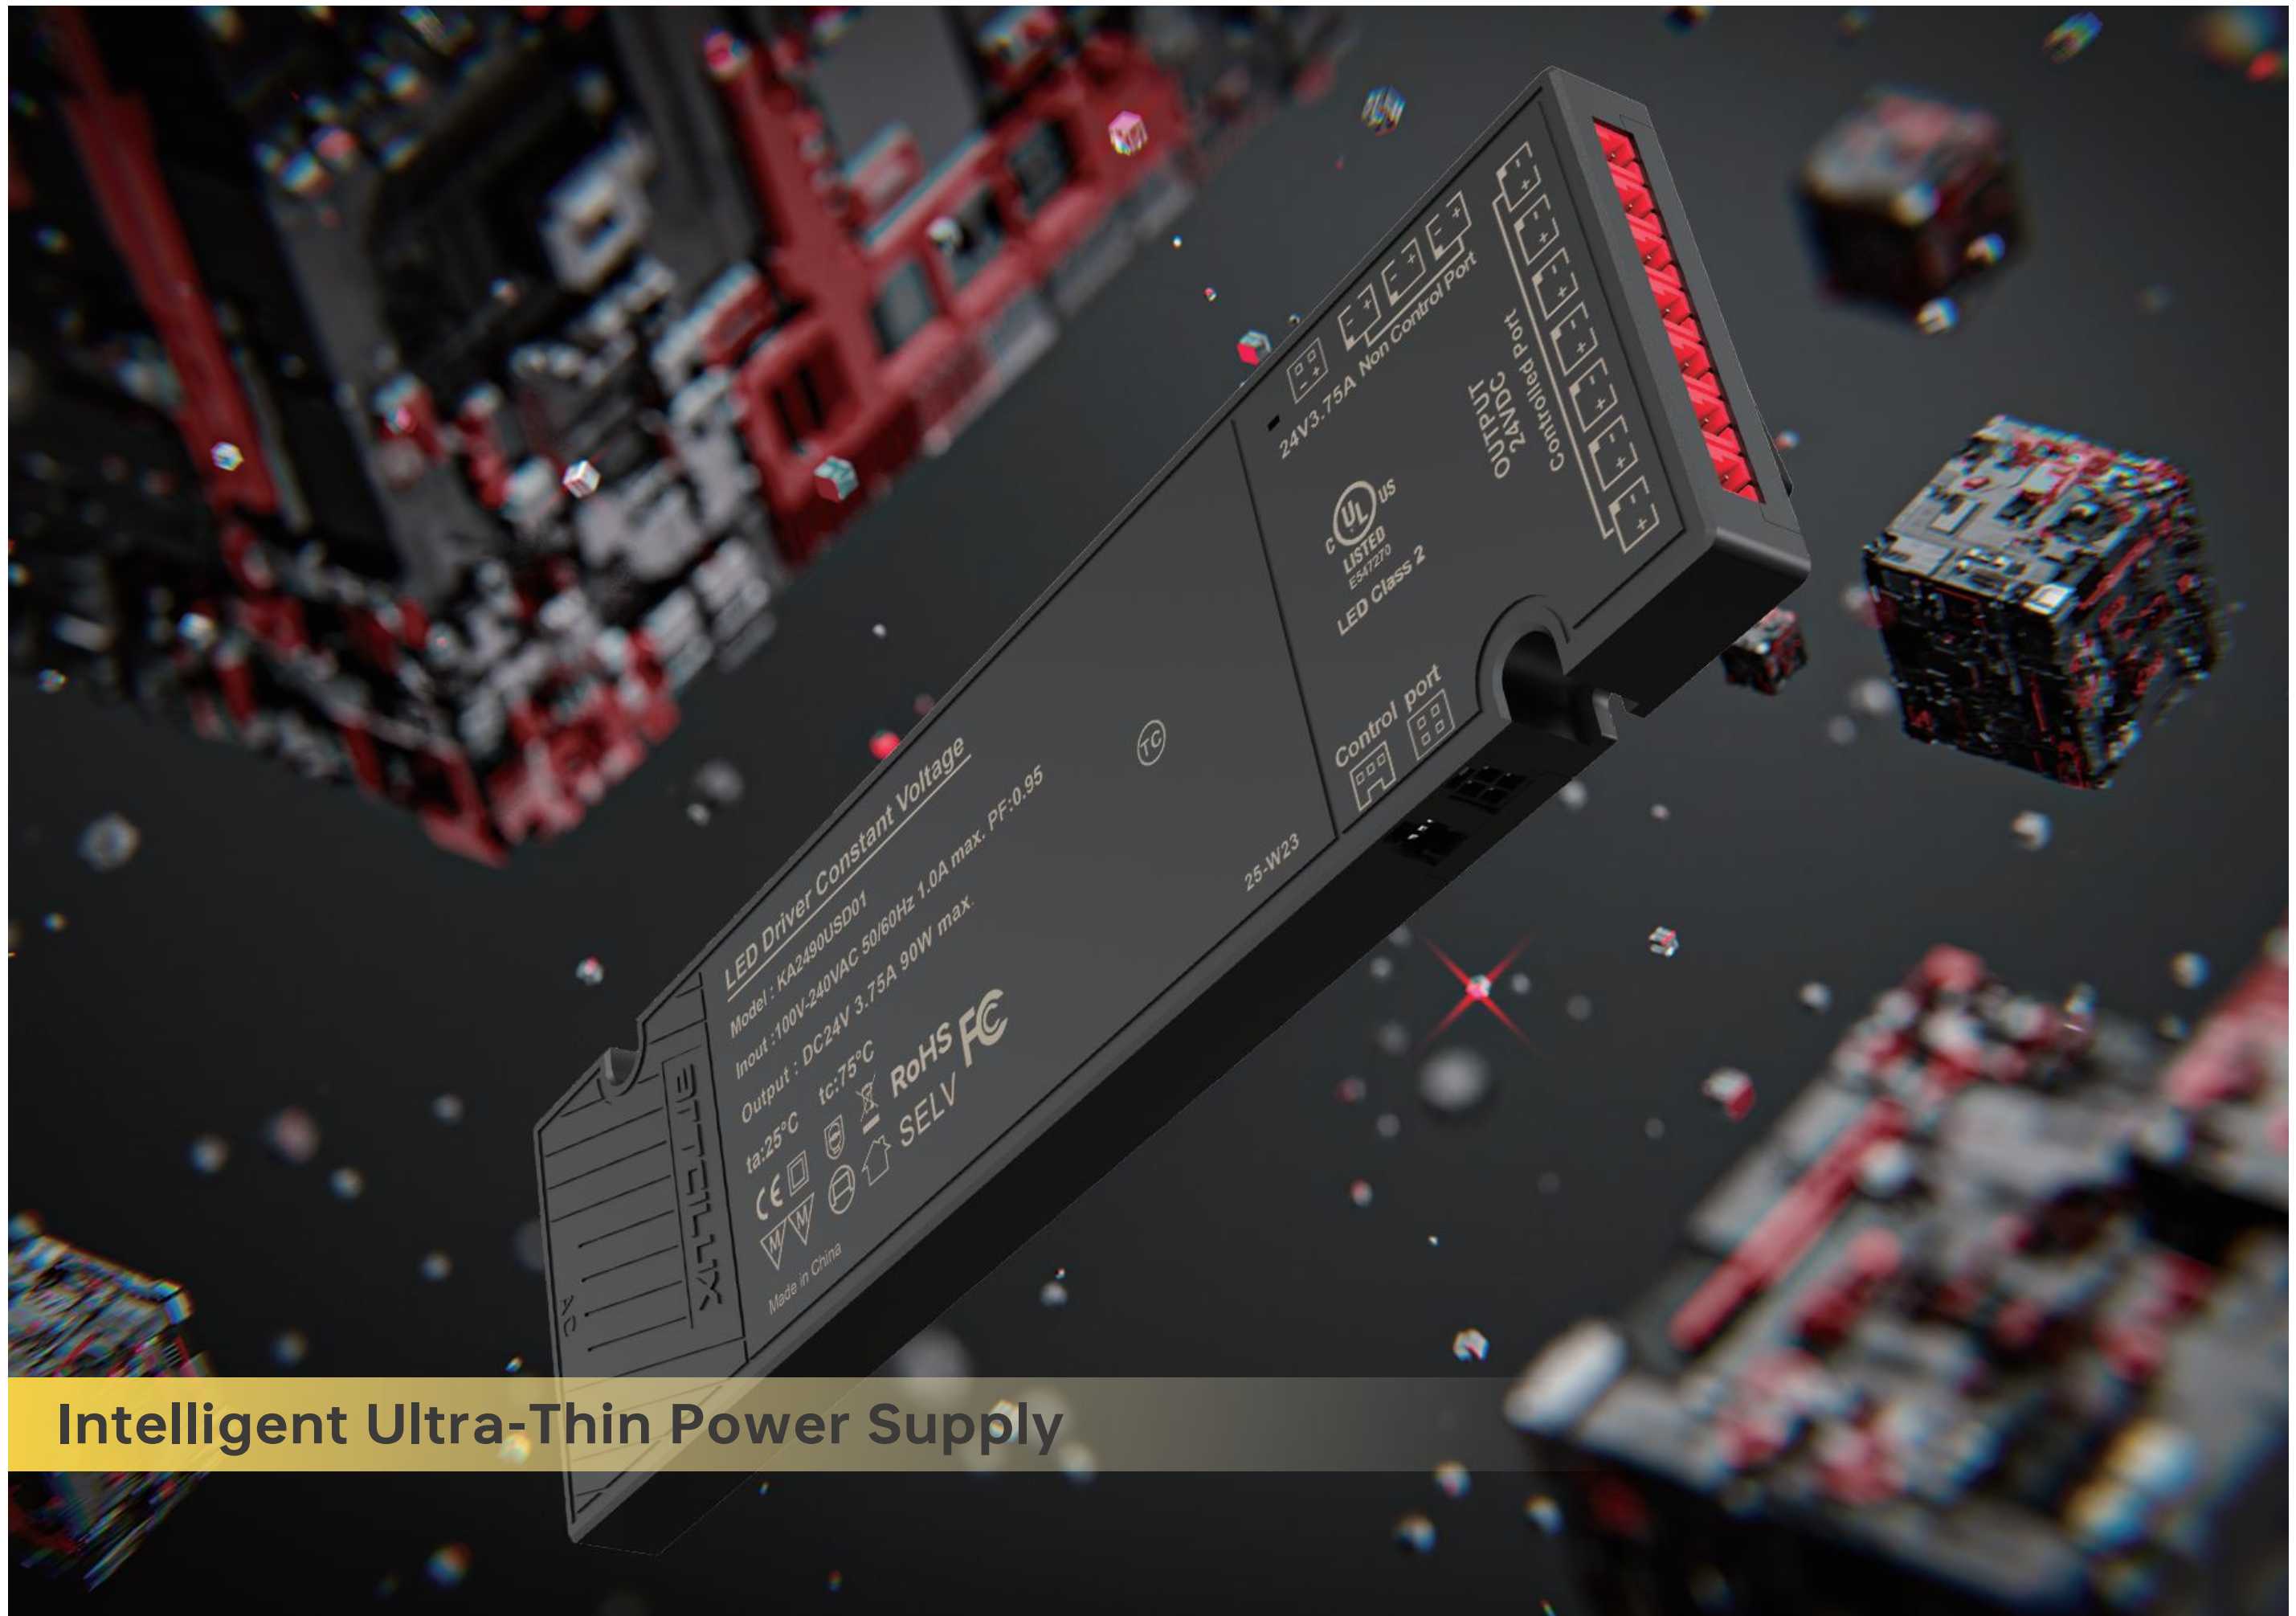

Intelligent Ultra-Thin Power Supply

LSD Series

LED Driver Constant Voltage



Ultra-thin design: 15mm ultra-slim body, invisible installation, suitable for narrow spaces, meeting diverse power needs;
Five-level protection: Overload, overvoltage, over-temperature, open circuit and short circuit protection all included, ensuring stable and safe power supply;
Authoritative certification: Dual certification for protection (CE certification + UL certification), strict international standard testing;
High efficiency and durability: High conversion efficiency, low heat generation and low loss, long service life and cost savings;

Warranty 3 Years

Model	KA1224USD01	KA1260USD01	KA2424USD01	KA2460USD01	KA2490USD01
Output Power (W)	24	60	24	24	24
Input Voltage	100-240V	100-240V	100-240V	100-240V	100-240V
Output Voltage	DC12V	DC12V	DC24V	DC24V	DC24V
Output Current	2.0A	5.0 A	1.0 A	2.5 A	3.75A
Safety Standards	UL1310;UL8750	UL1310;UL8750	UL1310;UL8750	UL1310;UL8750	UL1310;UL8750
Protection Rating	IP20	IP20	IP20	IP20	IP20
Number of Output Port	4 Fixture Ports, 1 Switch Port	6 Fixture Ports, 1 Switch Port	4 Fixture Ports, 1 Switch Port	6Fixture Ports, 1 Switch Port	7 Fixture Ports, 1 Switch Port
Color	Black	Black	Black	Black	Black
Size (LxWxH mm)	125x50x15	175x65x15	125x50x15	175x65x15	255x75x15
Standard Configuration	1 Driver and Installation Accessories				

Power plug according to different country standards - Power cable length 2 meters

Plug Type										
Country	UK	Australia	EU	USA	Japan	China	South Korea	Taiwan, China	EU	USA
QTY(PCS)	1	1	1	1	1	1	1	1	1	1

SEA Series

Intelligent Ultra-Thin Power Supply



Driver power supply, compliant with GB19510.14 safety standards;
15mm high-power ultra-thin design, first in the industry;
Made from ROHS-compliant materials, housing fire rating 94-V0;
Supports external intelligent dimming controllers (S1310D, S1310);
Multiple safety features: short-circuit protection, overload protection, over-temperature protection, reverse polarity protection;
Single-port gold-plated pin technology to meet high current requirements for divided control;

Warranty 5 Years

Model	K1224LSD01	K12/2465LSD01	K12100LSD01	K24120LSD01
Output Power (W)	24	65	100	120
Input Voltage	200-240V	200-240V	200-240V	200-240V
Output Voltage	DC12V	DC12/24V	DC12V	DC24V
Output Current	2A	5.4/2.7 A	8.3 A	5 A
Power factor	0.95	0.95	0.95	0.95
Protection Rating	IP20	IP20	IP20	IP20
Number of Output Port	6 Fixture Ports, 1 Switch Port	6 Fixture Ports, 1 Switch Port	6+3 Fixture Ports, 1 Switch Port	6+3 Fixture Ports, 1 Switch Port
Color	Black	Black	Black	Black
Size (LxWxH mm)	120x50x15	190x70x15	255 x 75 x 15	255x75x15
Standard Configuration	1 Driver and Installation Accessories			

Power plug according to different country standards - Power cable length 2 meters

Plug Type										
Country	UK	Australia	EU	USA	Japan	China	South Korea	Taiwan, China	EU	USA
QTY(PCS)	1	1	1	1	1	1	1	1	1	1

SEA Series

Intelligent Ultra-Thin Power Supply



Power supply features over-voltage, overload, and over-temperature protection, certified for safety;
Ultra-thin power adapter designed specifically for furniture lighting,
with a maximum thickness of only 16.5mm;
Equipped with a 5-foot power plug cable that meets different plug type demand
according to different countries and regions;
Built-in PWM control port, allowing selection of different control modules for light control.

Warranty 3 Years

Model	K12/2424SEA	K12/2436SEA	K12/2460SEA
Output Power (W)	24	36	60
Input Voltage	100-240V	100-240V	100-240V
Output Voltage	DC12/24V	DC12/24V	DC12/24V
Output Current	2/1 A	3/1.5 A	5/2.5 A
Power factor	0.5	0.5	0.5
Protection Rating	IP20	IP20	IP20
Number of Output Port	4 Fixture Ports, 1 Switch Port	6 Fixture Ports, 1 Switch Port	6 Fixture Ports, 1 Switch Port
Color	White	White	White
Size (LxWxH mm)	101x44.5x15.5	142x56.5x16.5	142x56.5x16.5
Standard Configuration	1 Driver and Installation Accessories		

Power plug according to different country standards - Power cable length 2 meters

Plug Type										
Country	UK	Australia	EU	USA	Japan	China	South Korea	Taiwan, China	EU	USA
QTY(PCS)	1	1	1	1	1	1	1	1	1	1

Note:



Closet Space




Hanging clothes



Decoration



Acceptor

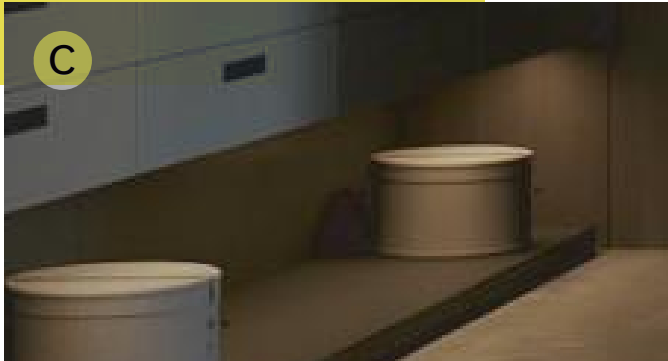

Closet Space

Hanging clothes

Install a human-sensing wardrobe light in the closet, and light up every part of the closet. Even if the room is not lit, it can meet the needs of picking up clothes, while improving the visual level and creating a bright and elegant living atmosphere.




Body sensing closet light (A337D)



Switch: comes with human body switch

Power supply: CCC drive power supply

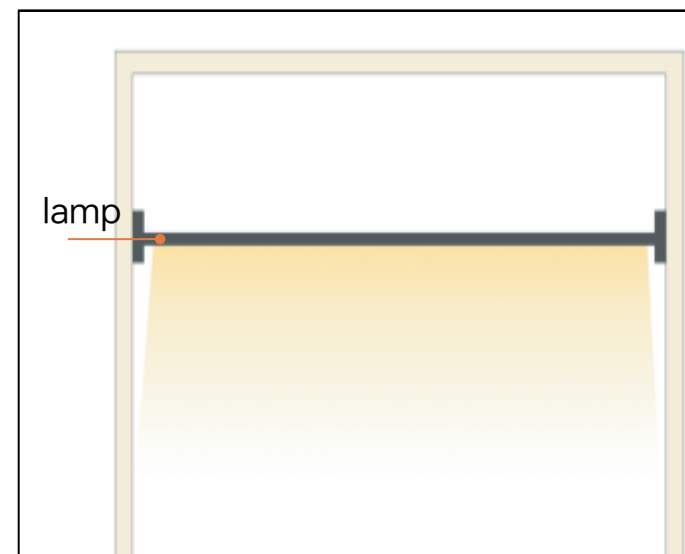

Closet Space

Decorate


Lamps are installed on the side panels, clothes placed on the side are washed, and indirect lighting on the facade optimizes the user's visual lighting needs when placing items, enhancing the visual level.



A2Q0L、A220D、A220EA、A220T、A2Q0R



Switch: Human switch Haisen 1SD13-6(S1606)
S1111A.JK.IR Personalized door touch switch (one of three)
AS1504 four-button 86 master switch
Power supply: Northern Lights CCC drive power

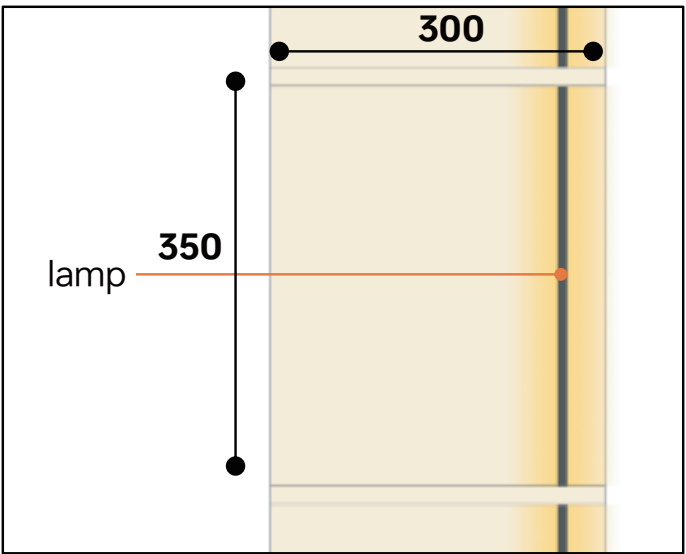

The luminaire is fixed on the backplane of the cabinet, and the luminaire is soft and plays a linear surface light effect.

The lighting illuminates the entire cabinet space, highlighting the clothes placed and enhancing the atmosphere of the space.


Cupboard space

Decorate


The installation of glass laminate lights can evenly illuminate the cabinet, optimize the user's demand for visual lighting when placing items, enhance the visual level, and create a bright and elegant living atmosphere.



Aluminum Frame Glass Shelf Light
A4A07/A4A08

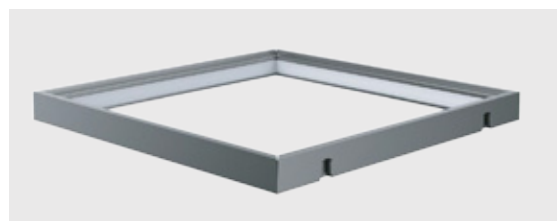

Switch: Gated sensor Haizon 1SD13-2(S1602)
Human body sensor 1SD13-6(S1606)
S1111A.JK.IR personalized door touch switch
AS1504 four-button 86 master switch
Power supply: Northern Lights CCC drive power

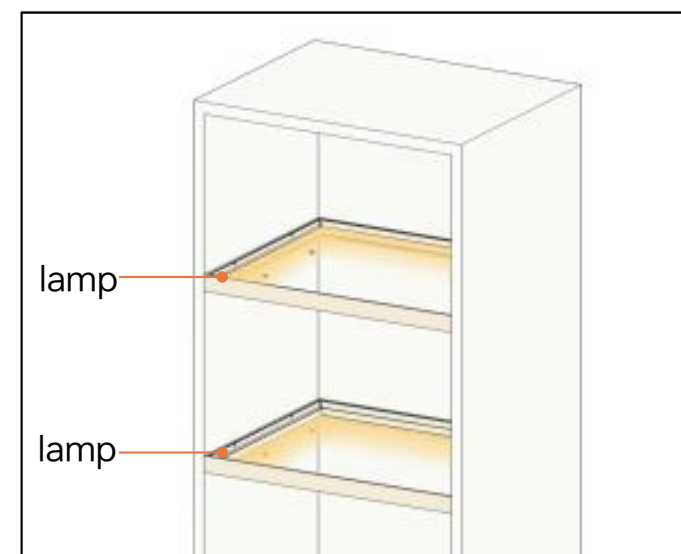

The luminaire is installed in the back of the top plate of the cabinet, the light is soft, and the effect of one-way wall washing is played.

The backplane of the cabinet is cleaned to optimize the needs of users when taking things, and it also has a better spatial lighting effect.

Closet Space

Decorate


Lamps are installed in the closet, and indirect lighting on the facade reflects style and design, heightens the atmosphere of the space, and optimizes the needs of users when picking up items.



Recessed diagonal light strip A220EA Recessed strip light A220T



Switch: Human switch Haisen 1SD13-6(S1606)
S1111A.JK.IR personalized door touch switch
AS1504 four-button 86 master switch
Power supply: Northern Lights CCC drive power

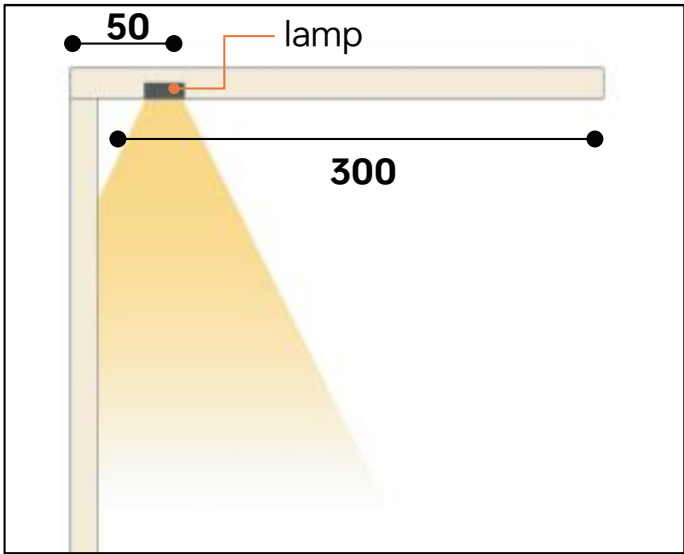

The luminaire is installed in the back of the top plate of the cabinet, the light is soft, and the effect of one-way wall washing is played.

Increase the human body induction control system to realize the light when people come, and automatically extinguish after people leave.

The backplane of the cabinet is cleaned to optimize the needs of users when taking things, and also play a better role in space lighting.

Closet Space

Accept


Install drawer lamps inside the low cabinet, the cabinet door lights up when accessing the storage items, lighting the inside of the cabinet drawer to optimize the needs of users when taking things.



Drawer light
A2517




- Switch: Own door touch switch
- Power supply: CCC drive power supply

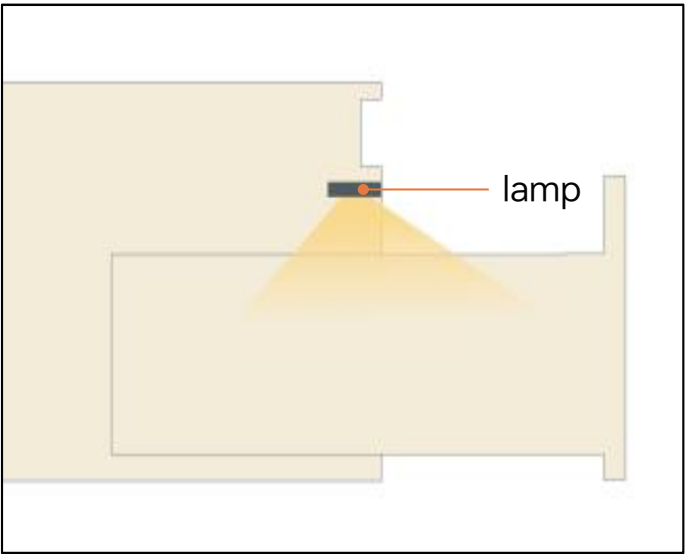


The luminaire is installed above the cabinet basket, and the maximum Angle light illuminates the drawer, which is convenient for users to take items.

Increase the door touch control system, realize the open door light, close the door automatically extinguished, optimize the furniture environment light.


Connection Method 1 Wired switch divided control Connection
(each port connects to a switch for separate control of lights; can use junction boxes to connect more LED fixtures)

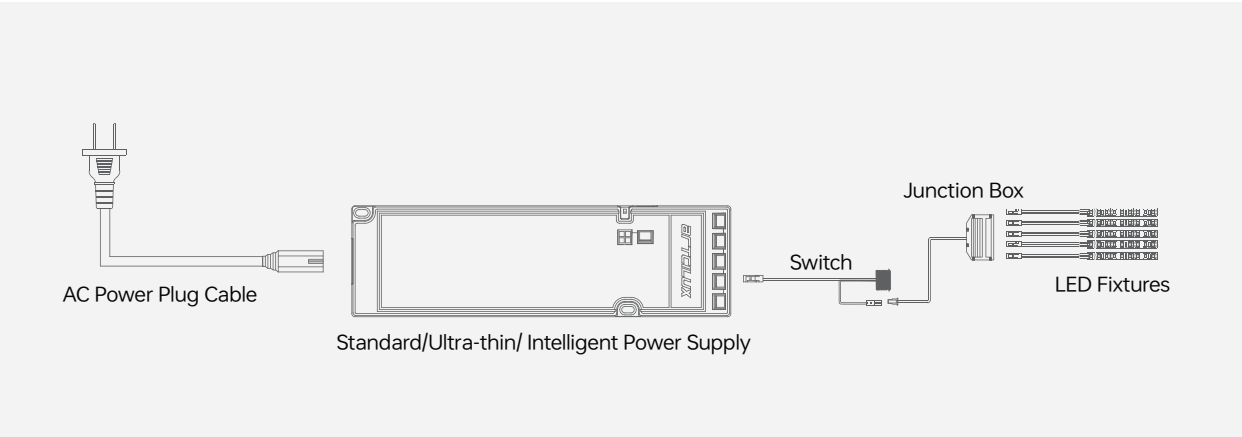


Connection Method 4 S160X Wired Switch Divided Control Connection
(Including touch/hand-sweep/ PIR /door sensing switch , etc.)

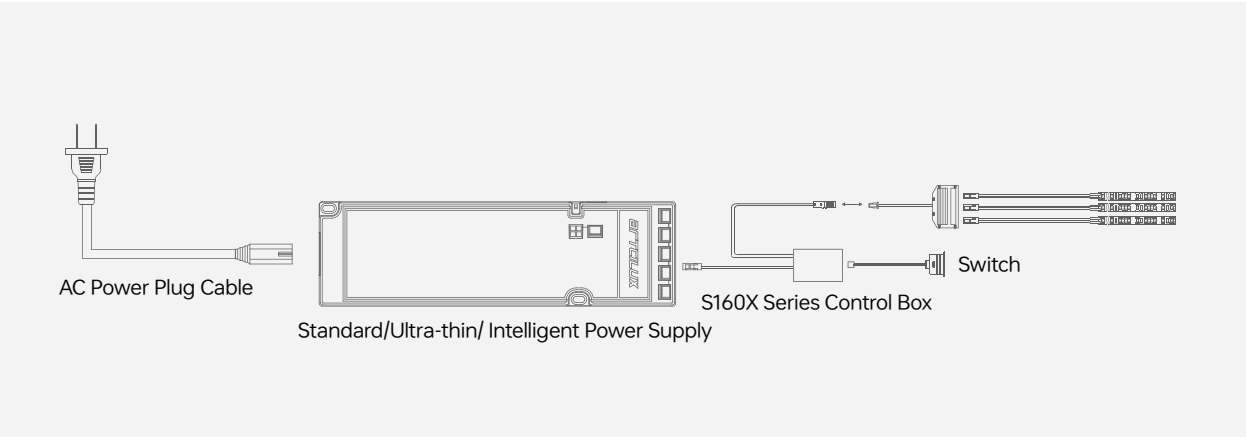


Connection Method 2 S110X Wired Switch Divided Control Connection
(Connect port connects to the control box, which connects to switches/multiple switches for customized DIY switch combinations)

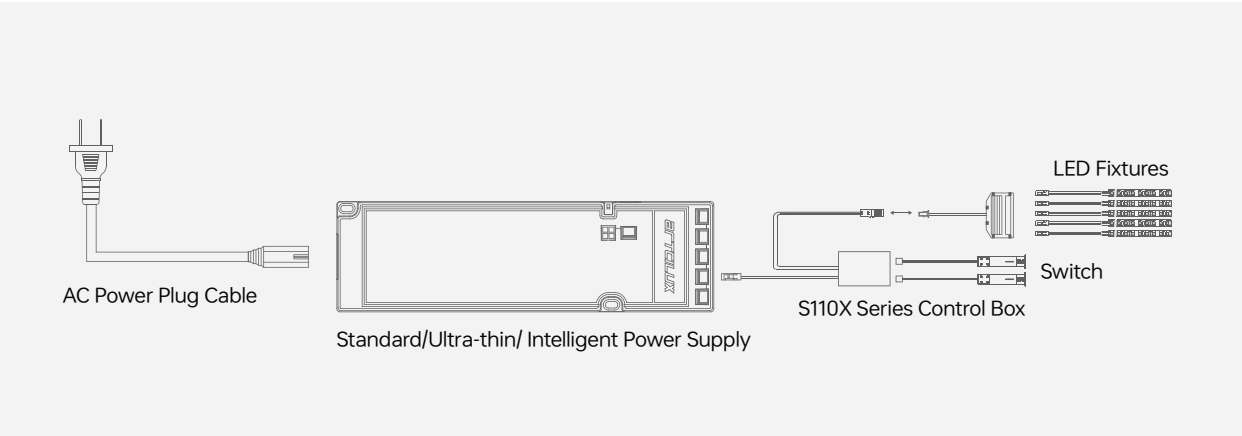

Connection Method 5 S13 Transmitter with Wireless Switch for Divided Control
(Including touch/hand-sweep/ PIR /door sensing switch , etc.)

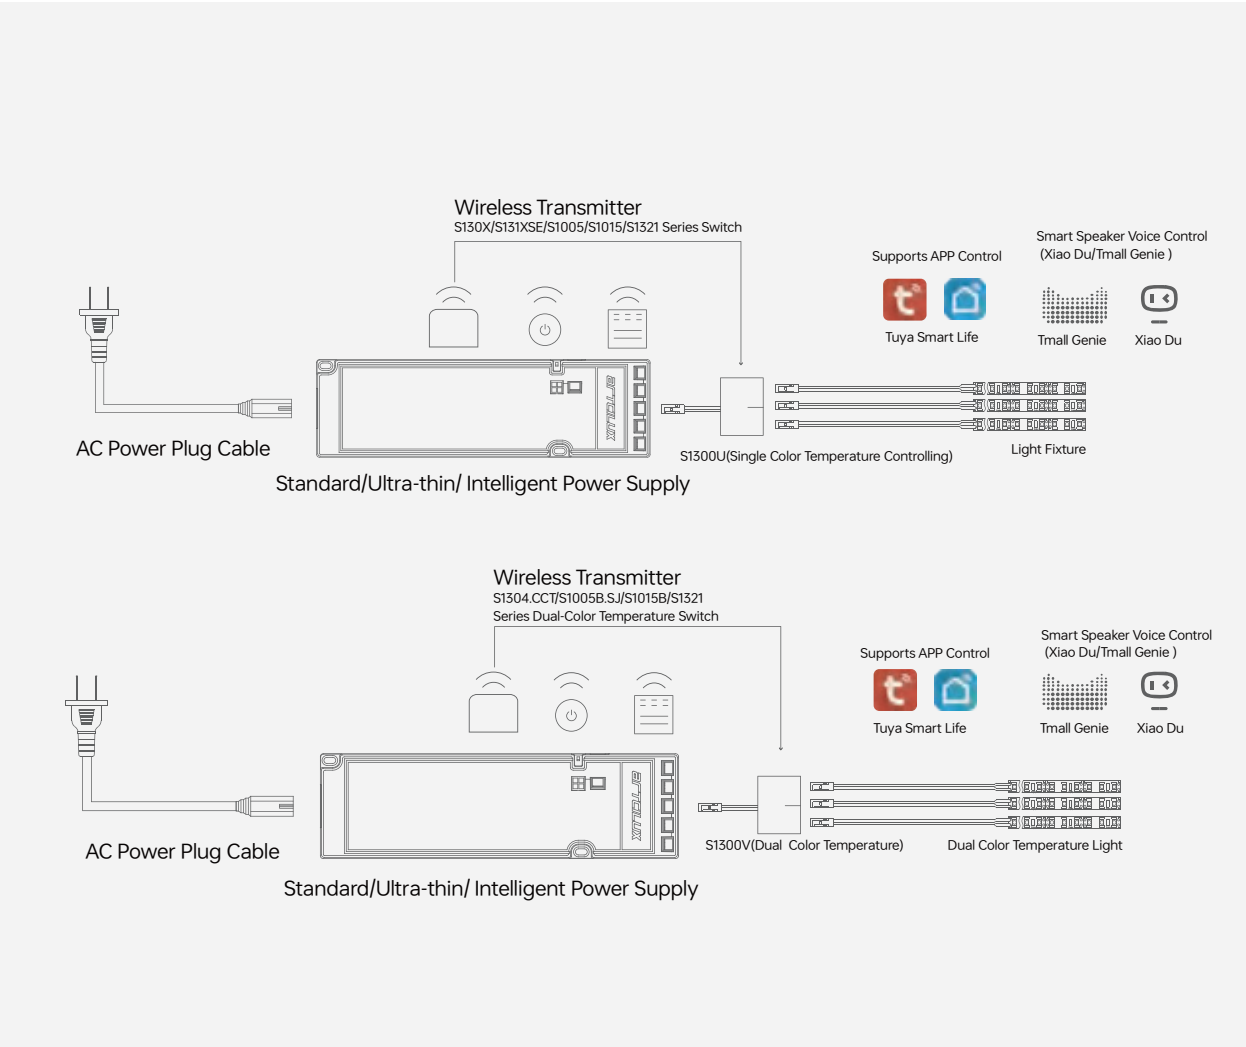


Connection Method 3 S140X Wired Switch Divided Control Connection
(S140X control box integrates multiple sensing methods, up to 4 switches for individual controlling)

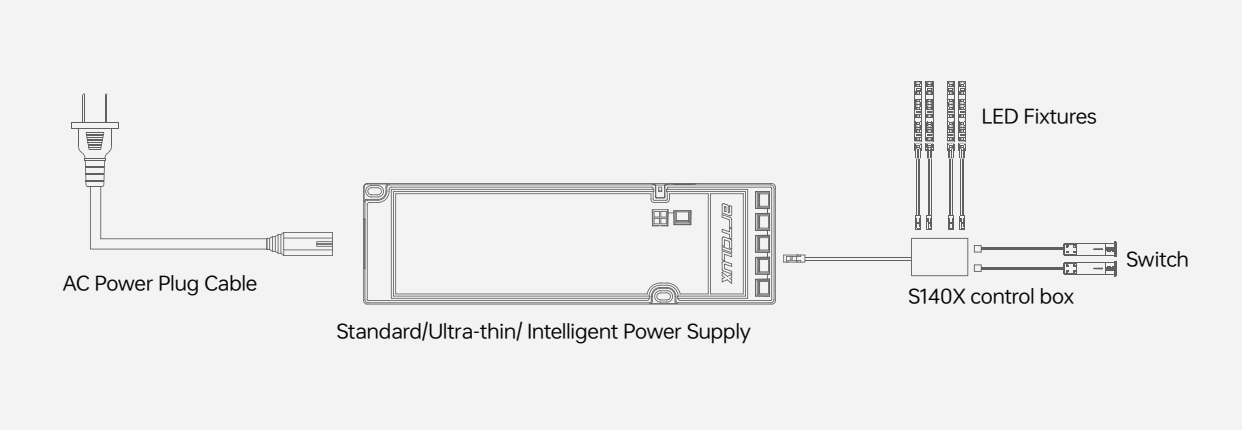

Connection Method 6 Wireless Switch Series Connection

(S1300 primarily addresses network delays among multiple control boxes, ensuring consistent dimming through a signal extender)

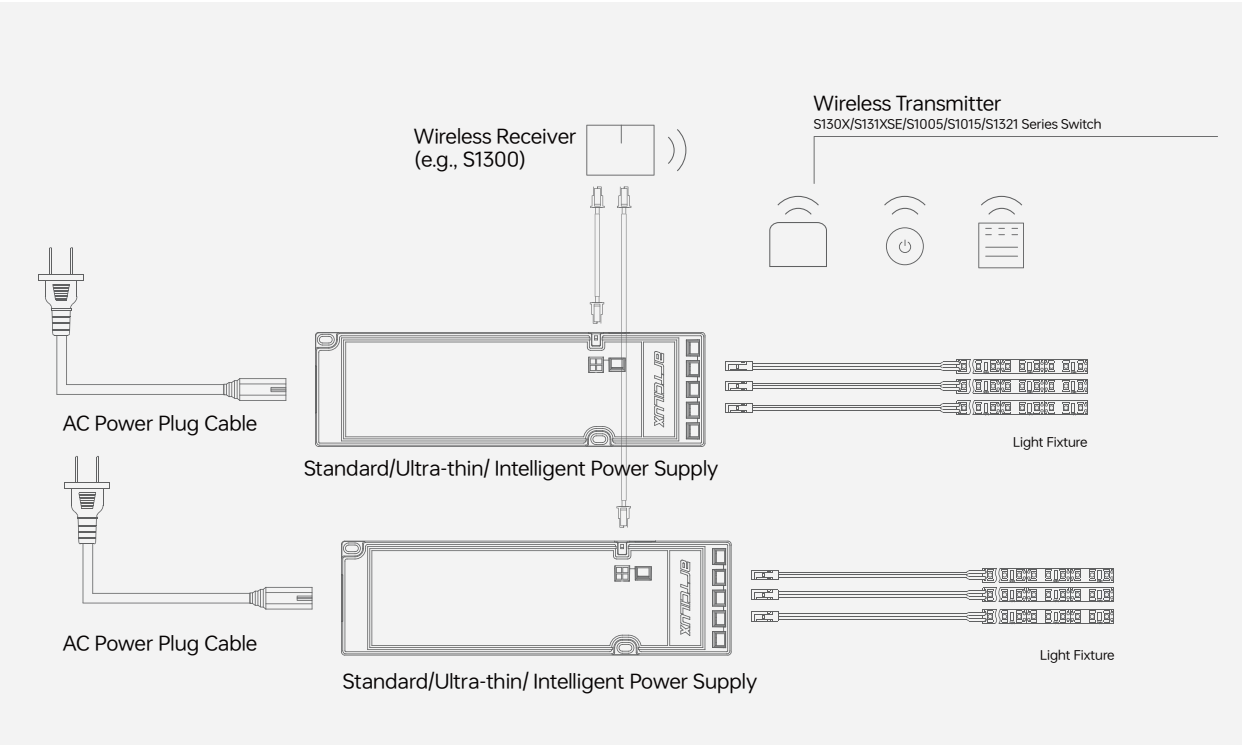

Note:

